



# International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 2, Issue 10, October 2014

## Fractal Microstrip Antenna for Wireless Application

K.Pandiammal<sup>1</sup>, S. Arulselvi\*<sup>2</sup>

Assistant Professor Department of Electronics and Communication Engineering, Jerusalem College of Engineering, Chennai, Tamil Nadu, India <sup>1</sup>

Assistant Professor, Department of Electronics and Communication Engineering, Bharath University, Chennai, Tamil Nadu, India <sup>2</sup>

\* Corresponding Author

**ABSTRACT:** Wideband application put a new demand on antennas pertaining to size, gain, efficiency, bandwidth and more. This paper presents the design and analysis of fractal antenna which uses the self similarity property of fractal geometry. This unique property is exploited to develop antenna elements that are wideband and compact possessing highly desirable properties. The presented antenna is circle inscribed octagon shaped. Simulation results show that the antenna can be used in different frequency ranges exhibiting wideband properties. Radiation pattern and gain characteristics are also analysed.

**KEY WORD:** Fractals, Wide Band, Fractal Microstrip Patch Antenna.

### I. INTRODUCTION

Modern developments in communication systems require antennas with wider bandwidth and smaller dimensions. Demand for such antennas which are smaller in size, low fabrication complexity and low cost has increased in military as well as commercial applications. For conventional antenna if size is less than a quarter wavelength then radiation bandwidth and efficiency is reduced [3]. This problem is overcome by using fractal geometry in designing antennas. Fractals have self similar shapes and space filling properties that can be subdivided into parts. This property makes the fractal antenna compact and wideband. The different fractal elements of the antenna make it to have different resonances. The presence of discontinuities in the geometry increases the bandwidth and radiation properties of antenna. It also has long electrical lengths that fit into a compact size [8][5].

In this paper a new fractal geometry which is circle in octagon shaped is designed. Antenna parameters for different operating frequencies of 20GHz and 10GHz, in different frequency ranges are analysed and found to exhibit multiple bands. Simulation is done in Ansoft HFSS software and the results are compared.

### II. DESIGN APPROACH

Fractal microstrip patch antenna is designed based on iterative method [8]. Dimension of each iteration is different. A number of iterations can be performed but considering fractal antenna's compactness only three iterations are performed. Also, in higher iterations there is no significant change in antenna properties [1]. The interior and exterior radius of the octagon, as shown in figure 1, is given by

$$r_e = \frac{a}{2} * \sqrt{4 + 2\sqrt{2}}$$
$$r_i = \frac{a}{2} * \sqrt{1 + \sqrt{2}}$$

Where,

# International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 2, Issue 10, October 2014

a – side of the octagon  
 $r_e$  – External radius  
 $r_i$  – Internal radius

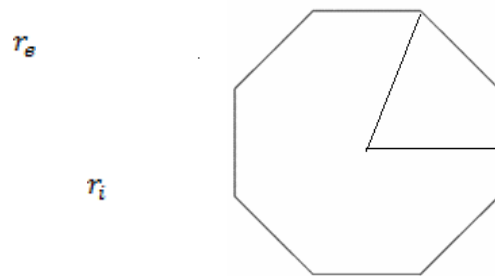


Figure 1: Geometry of Octagonal Sub array

The array factor of the fractal antenna is given by [4],

$$AF_p = \prod_{p=1}^p GA(\delta^{p-1}\psi)$$


Where,

$\delta$  - Scaling factor


P - Level of iteration

$GA\psi$  – Array Factor Associated with Generating Array

The radius of the circle that is subtracted from the octagon is the interior radius of the octagon. This is repeated till the third iteration is obtained. The side of the first iterative octagon is  $a=14.7\text{mm}$  and radius of the first inner circle subtracted is  $r=17.8\text{mm}$ . The three iterative patterns with CPW feed are shown in figure 2.

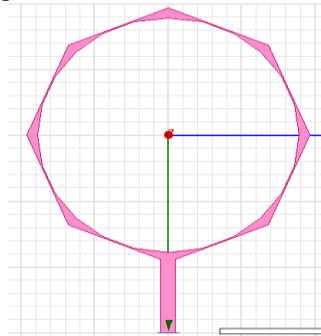

First Iteration




Second Iteration

# International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 2, Issue 10, October 2014



Third Iteration

Figure 2: Iterations with CPW Feed

The dimensions of the ground plane is 60x60 mm. The antenna is placed on fr4 substrate with  $\epsilon_r = 4.4$  and thickness 0.25mm. The substrate is placed over a ground plane of pec with thickness 1mm. CPW feed of length 11.2mm and width 2mm is given to the patch. CPW feed is used because it exhibits broad bandwidth matching, coplanar capability low dispersion at higher frequencies and ease of design and fabrication [2]. Feed dimensions are selected to obtain impedance of 50 ohms for proper impedance matching. A wave port is designed at the end of the feed line.

### III. SIMULATION RESULTS AND DISCUSSION

Antenna is designed using High Frequency Structured Simulator (HFSS) software. The patch is a perfect – E conductor. The third iteration is found to have improved antenna parameters compared to the first and second. Return loss plots for second and third iterations in the frequency range of 1GHz – 18GHz operating at 10GHz and 10GHz – 40GHz operating at 20GHz is shown in figure 3 respectively. It is observed that the return loss characteristics of third iteration are less than the second in both frequency ranges.



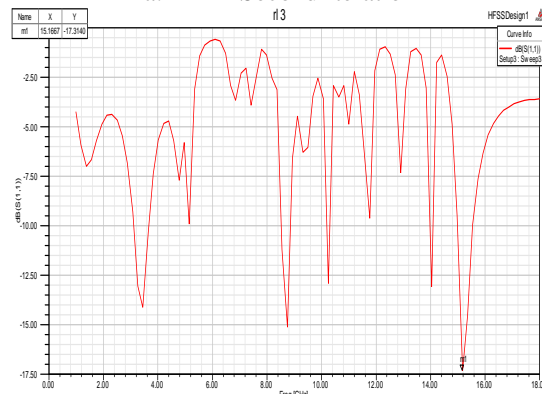


Figure 3: Return Loss Plot in 1GHz – 18 GHz Range


# International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 2, Issue 10, October 2014

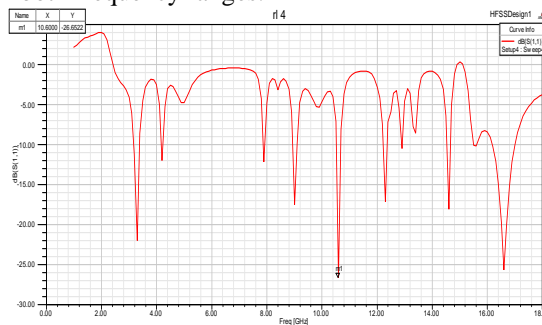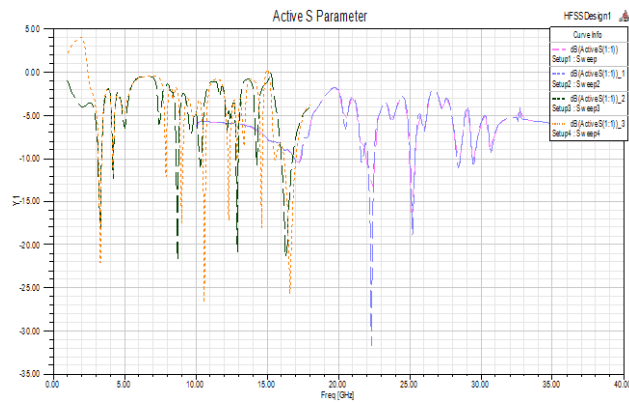


a. Second Iteration

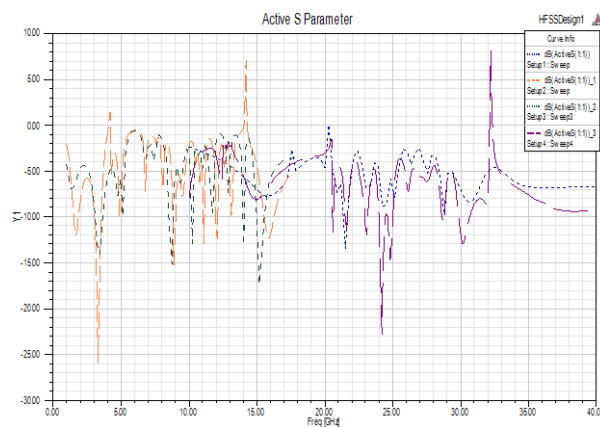

b. Third iteration

Figure 4: Compared Return Loss for different frequencies

Comparison of return Loss for different frequencies is shown in figure 4. Return Loss Plot for 10GHz – 40GHz Range is for Second and third iteration is shown in figure 5. It is found in third iteration the return loss is reduced.

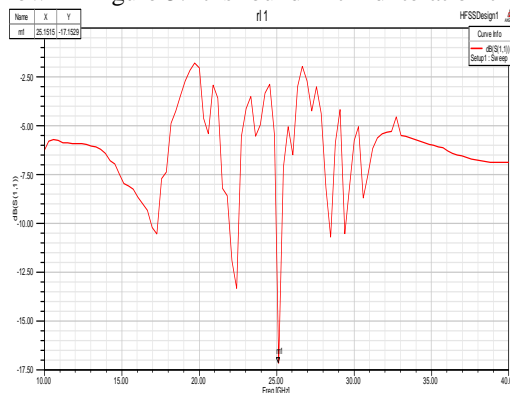


a. Second Iteration

# International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)


Vol. 2, Issue 10, October 2014

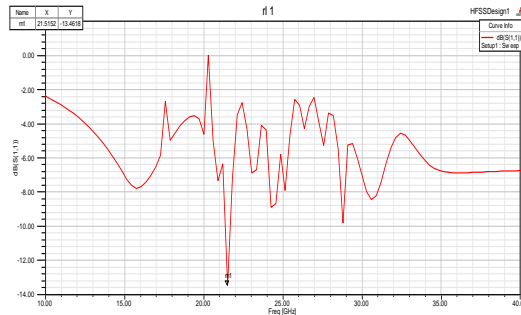


b. Third Iteration

Figure 5: Return Loss Plot for 10GHz – 40GHz Range

Gain Vs frequency plot of the third iteration for the two frequency ranges are shown in figure 6. In 1GHz – 18GHz, a bandwidth of 5.954GHz corresponding to 198.33% is obtained in the range of 5.62GHz – 11.57GHz. The frequency range 10GHz – 40GHz is found to have multiple bands. Some of the significant bands are from 13.54GHz – 17.48GHz, 17.70GHz -19.91GHz, 25.03GHz - 26.03GHz, with bandwidths of 3.94GHz, 2.21GHz, 1GHz respectively. An omnidirectional radiation pattern is obtained at different frequencies as shown in figure 7.

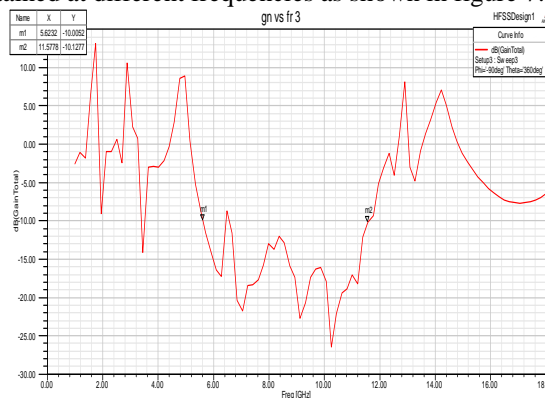

a. 1GHz – 18Ghz Frequency Range

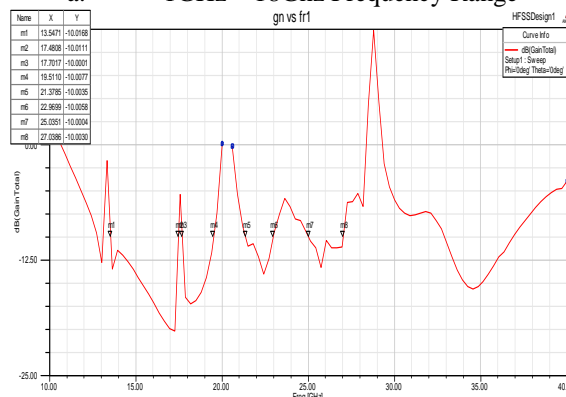

b. 10GHz – 40GHz Frequency Range

Figure 6: Gain Vs Frequency Plot

# International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 2, Issue 10, October 2014

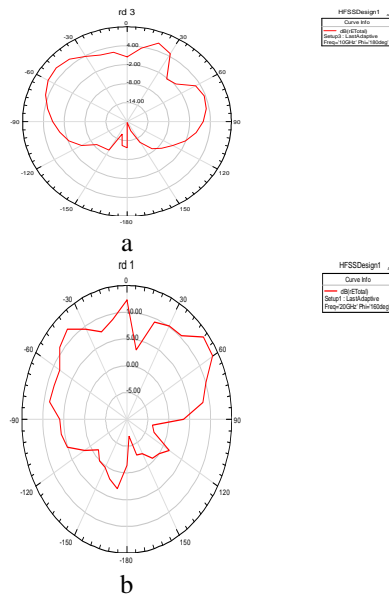


Figure 7: Radiation Pattern

## IV. CONCLUSION

The new fractal antenna is designed and simulated using HFSS software. Results for different operating frequencies for different frequency range 1GHz-18GHz and 10GHz – 40GHz has been analysed. Since it exhibit good wideband characteristics, it has found its application in wireless application. This microstrip antenna assures simplicity in design and fabrication.

## ACKNOWLEDGEMENT

We the authors would like to thank the Registrar Dr.K.O.Joseph, Prinicpal Dr.N.Ramaraj and HOD Dr.D.Balasubramanian for the encouragement rendered in completion of this project with their constant technical support and invaluable guidance.

## REFERENCES

- [1]Ayachi Ajey, Shambavi and Zachariah C Alex, “Design and Analysis of Fractal Antenna for UWB Applications”, 2012 IEEE Students’ Conference on Electrical Electronics and Computer Science.
- [2]Rajkumar, P. Malathi, “On The Design of CPW-Fed Ultra Wideband Triangular Wheel Shape Fractal Antenna”, Rajkumar, P. Malathi, International Journal of Microwave and Optical Technology, Vol.5, No.2, March 2010.
- [3]Raj Kumar, J P Shinde, P N Shinde, M D Uplane, “On the design of CPW-Fed Square Octal Shaped Fractal UWB Antenna” , IEEE 2009.
- [4] Abolfazl Azari, “Super Wideband Fractal Antenna Design”, 2009 IEEE.
- [5]Kulbir Singh, Vinit Grewal and Rajiv Saxena, “Fractal Antenna: A Noval Miniaturization technique for Wireless Communications”, International Journal of Recent Trends in Engineering, Vol 2, No. 5, Nov 2009.
- [6] A. Anzari, J. Rowhani, “Ultra Wideband Fractal Microstrip Antenna Design”, Progress in Electromagnetics Research c vol.2, 7-12, 2008.
- [7]C. A. Balanis, Antenna Theory: Analysis and Design, 3<sup>rd</sup>. Hoboken, NJ: Wiley, 2005.
- [8]D.H. Werner and S. Ganguly, ‘An Overview of Fractal Antenna Engineering Research”, IEEE, Antenna and Propagation Magazine, Vol 45, No. 1,38 – 57, 2003
- [9]J.P. Gianvittorio and Y.R. Samii, “Fractal Antennas: A Noval Antenna Miniaturization Technique and Application”, IEEE Antennas Propag. Mag., vol. 44, No. 1, Feb. 2002.
- [10] B Karthik, TVUK Kumar, Noise Removal Using Mixtures of Projected Gaussian Scale Mixtures, World Applied Sciences Journal, 29(8), pp 1039-1045, 2014.



ISSN(Online): 2320-9801  
ISSN (Print): 2320-9798

# International Journal of Innovative Research in Computer and Communication Engineering

*(An ISO 3297: 2007 Certified Organization)*

**Vol. 2, Issue 10, October 2014**

- [11] Daimiwal, Nivedita; Sundhararajan, M; Shriram, Revati; , Non Invasive FNIR and FMRI system for Brain Mapping .
- [12] Daimiwal, Nivedita; Sundhararajan, M; , Functional MRI Study for Eye Blinking and Finger Tapping.
- [13] Shriram, Revati; Sundhararajan, M; Daimiwal, Nivedita; , Effect of change in intensity of infrared LED on a photoplethysmogramIEEE Communications and Signal Processing (ICCSP), 2014 International Conference on, PP 1064-1067,2014.
- [14] Kanniga, E; Srikanth, SMK; Sundhararajan, M; , Optimization Solution of Equal Dimension Boxes in Container Loading Problem using a Permutation Block AlgorithmIndian Journal of Science and Technology, V-7, I-S5,PP 22-26, 2014.
- [15]Muralibabu, K; Sundhararajan, M; , PAPR performance improvement in OFDM system using DCT based on adjacent symbol groupingTrans Tech Publ, Applied Mechanics and Materials, V-550,PP 204-209, 2014