



# **Investigation of 2-Ghz Threshold Levels for Radio Waves in the Southern Region of Nigeria**

Donatus E. Bassey, F. O. Faith-Praise, E. Udoeno, E. E. Eyime

Senior Lecturer, Electronics and Computer Technology Unit, Department of Physics, University of Calabar, Calabar,  
Nigeria.

Lecturer 1, Electronics and Computer Technology Unit, Department of Physics, University of Calabar, Calabar,  
Nigeria.

M.Sc Student, Electronics and Computer Technology Unit, Department of Physics, University of Calabar, Calabar,  
Nigeria.

Ph.D Student, Electronics and Computer Technology Unit, Department of Physics, University of Calabar, Calabar,  
Nigeria.

**ABSTRACT:** The measurement and analysis of Radio waves transmission are rudimentary for optimization and planning of radio communication networks. These assessments are usually done through series of propagation measurements, computation of intensive radio waves simulation, or by empirically estimating transmitted field strengths. In collaboration with M-TEL, Nigeria, measurements on W-CDMA based mobile networks, modeled IS-95 and cdma2000, were carried out. The study centered on 2G and 3G bands. The received signal was mixed and amplified to an in-phase quadrature baseband signal levels through a common DSP board for 900MHz and 2000MHz. The recorded time interval for impulse response of data was 0.1s, while the mobile recording instrument maintained a low continuous velocity of approximately 1.5 m/s, along the trajectory leading to the specified locations. Samples from the results of the study indicate that: Calabar urban recorded mean signal path loss of 82.9dB, as against a predicted path loss of 94.5dB. Values for path loss mean square error and standard deviation were 4.48dB and 4.42 dB respectively. Similarly, measured signal penetration recorded 5.9 dB, as against predicted urban environmental path loss model of 2.7dB – 3.5 dB. The remarkable difference between measured and predicted values for the studied locations was attributed to obstructions of the signal path. Results from the study can be used for validation of existing propagation models for urban, residential and office blocks located in the Southern part of Nigeria.

**KEYWORDS:** Attenuation coefficient, empirical, predicted path loss, propagation models, and signal path loss.

## **I. INTRODUCTION**

The establishment of effective radio communication system is usually encumbered with problems associated with complications arising from the transmission and reception of signal. Therefore, the design of effective and efficient wireless radio systems requires insight of the radio transmission characteristics and path-losses. These parameters vary with the operating frequency and the propagation environment [3, 13].

In considering these parameters, individual links can be utilized by plethora of Base transceiver stations, when the distance between the up converter and down converter is sufficiently wide.

The height of the antenna at the mobile terminal is often very small usually below a meter. Consequently, the receiver's antenna contains extremely small "clearance" thereby permitting blockages and surface reflection in the neighborhood of the receiver [14, 15]. This functions reduces the receiver's significant control of the propagation characteristics of the radio waves. Also these characteristics may have a propensity to vary from one place to the other

# International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 4, Issue 5, May 2016

if the mobile unit is in motion. Hence, the path link between the transmitter and the receiver can diverge from line-of-sight to one that is rigorously blocked by intervening buildings, traffic, foliage, terrain, etc.

Sequence of studies have been conducted on the transmission of cellular mobile at frequency range of 900 MHZ and 1900 MHZ [7]. Some of these studies related to penetration into urban office buildings and their vicinity [3,5]. However, this article is an extract from a comprehensive study carried out on radio waves transmission characteristics between urban, suburban and rural residential locations in the Southern region of Nigeria. The sole objectives are to contribute to the optimization of the operating networks through research studies, and to aid the network innovators on planning future radio communication networks for high rain forest zones.

## II. RELATED WORK

A radio wave is a form of electromagnetic field (EM) wave consisting of electric field ( $\vec{E}$ ) and magnetic field ( $\vec{H}$ ) components. It propagates through the free space with the speed of light (approximately,  $3 \times 10^8$  m/s). Free space refers to a medium where there is no interference or obstacle to the normal radiation and propagation of radio waves.

The electric field intensity ( $E$ ) and magnetic field intensity ( $H$ ) of a wave are not independent. In plane waves, for example, the  $E$  and  $H$  vectors are mutually perpendicular and are related by the expression [2].

$$\vec{E} = \Gamma * \vec{H} \quad (1)$$

Where  $\vec{E}$ , known as the pointing vector, is the power flux per unit area.  $\vec{E}$ , is always perpendicular to the plane of  $\vec{H}$  and  $\vec{H}$ . Hence, in a plane wave the vector  $\vec{E}$  and  $\vec{H}$  are mutually perpendicular.

### A. Radio (EM) Waves in Free Space

In free space, radio waves radiate uniformly in all directions from a point source. This is known as isotropic radiation. According to the inverse square law, the power density,  $P_d$  is inversely proportional to the square of the distance,  $r$ , from the source [8].

$$P_d = \frac{P_t}{4\pi r^2} \quad (2)$$

Where,  $P_t$  is the transmitting power at the source. If  $r$  is relatively greater than the wavelength of the transmitted signal, then the wave is in a plane wave. In such a case,  $E$  and  $H$  are related by the formula.

$$E = ZH \quad (3)$$

Where  $Z$  is known as the characteristic impedance of the medium, and,  $E$  and  $H$  are both rms values.  $Z$  is given by the expression.

$$Z = \sqrt{\frac{\mu}{\epsilon}} \quad (4)$$

Where  $\mu$  = permeability of the medium, and  $\epsilon$  permittivity of the medium.

In free space,

$$\mu = \mu_0 = 4\pi \times 10^{-7} \text{ Henry /meter}$$

$$\epsilon = \epsilon_0 = 8.854 \times 10^{-12} \text{ Farads /meter}$$

Hence, the characteristics impedance of free space is

$$Z_0 = \sqrt{\frac{\mu_0}{\epsilon_0}} = \sqrt{\frac{4\pi \times 10^{-7}}{8.854 \times 10^{-12}}} = 120\pi \text{ ohm} \quad (5)$$

The electric field intensity at a point  $r$  meters away from the point source is:

$$E = \sqrt{P_d \cdot Z_0} = \sqrt{\frac{P_t \cdot 120\pi}{4\pi r^2}} = \sqrt{\frac{30P_t}{r^2}} \quad (6)$$



# International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 4, Issue 5, May 2016

This means that  $E$  is inversely proportional to  $r$ , while  $P_d$  is inversely proportional to  $r^2$  [8].

## III. MEASUREMENT PROCEDURES

In collaboration with M-TEL, South East Zonal Deputy General Manager, wideband (W-CDMA) pilot scanner and a laptop for carrying out measurements on W-CDMA based mobile networks, (modeled IS-95 and cdma2000) were accessed for this study. The scanner has two radio units that covered both second and third generation (2G and 3G) mobile networks. Additional equipment were the omni-directional antenna, a weather station, a global positioning system (GPS) unit and a laptop running a software capable of controlling and logging results from the measurement. The measurement system can track up to eight channel (pilot) signals concurrently, and the corresponding peak (correlation peak) pilot signal; thereby allowing for tracking of speedy signal fades [3, 10].

The W-CDMA scanner consists of a number of independent hardware modules, with major internal components such as:

- Digital signal processing (DSP) board, incorporating a field programmable gate array (FPGA) and various analog and digital inputs and outputs converters.
- Co-processor, supplementing the DSP with high-level data processing and a universal serial bus (USB) interface to an external computing laptop.
- 900MHz and 2000MHz radios designed to receive signals from 2G and 3G CDMA systems.
- GPS receiver obtaining spatial position information during measurements [6]

In order to measure both 2G and 3G bands, two independent radios were incorporated. The received signal was mixed and amplified to an in-phase quadrature baseband signal. The DSP board was used common to both 900MHz radio and 2000MHz.

Other supporting components were: Radio Analog (MUX) control unit, sensor data control, sensor data weather station, In-phase Quadrature Main DSP board, High speed serial link, (25Mbps) DSP Co-processor, GPS receiver, USB link to Laptop (PC), W-CDMA scanner integrated hardware components and interactions radios. Also, there were two high-speed analog-to-digital (A/D) converter channels. Since the scanner is limited to 2G and 3G operation, the 900MHz and 2000MHz radio signals were multiplexed together, while the scanner operates in either 2G or 3G mode at one time, depending on the configuration. The baseband signals were processed by both FPGA-based signal processing hardware and DSP software, to correlate the received spread-spectrum signals. Thus, detecting the pilot and synchronization (sync) channel signals. The pilot and sync data were passed to a second DSP co-processor through serial link. The secondary processor was responsible for formatting and transferring the pilot and sync data to the measurement laptop. In addition, the co-processor managed the GPS receiver.

The main operator interface is the graphic user interface (GUI) software running on a laptop. The scanner GUI allows the operator to input control commands and to display the pilot. Control commands may be passed from the scanner GUI to the co-processor and when necessary to the main DSP.

### A. Network Hardware Configuration

The system was configured to operate under 900 MHz through the following procedures.

- The RF signal input to the radio was obtained through the antenna, which was selected via transistor-transistor logic (TTL) signal output from the DSP. The main function of the radio was to amplify the input RF signal using suitable automatic gain control (AGC) mechanism.
- The radio also incorporated a frequency synthesizer, which was programmed via a serial line from the digital module. Thereby, allowing for the definition of the CDMA RF channels. It is equipped with a voltage control crystal oscillator (VCXO), which is the source of the clock frequencies used by the radio [9].
- The radio AGC outputs a receiver signal strength indicator (RSSI) signal, which covered the receiver dynamic range of  $-105$  to  $-30$  dBm.

A laptop running through GUI controlled all the scanner features and enables selected parameters to be logged to file-enabled for later off-line data analysis. In the upper toolbar, there were buttons that were used to control the measurements in real time, or when playing back measured data (run, stop, recorded.). Two check-boxes used to activate or deactivate the GPS unit and the weather station, were positioned in the toolbar's upper right area [11]

# International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 4, Issue 5, May 2016

## B. Implementation

The radio transmission path profile measurements started at OkoiArikpo House, a-multi story building located in the heart of Calabar (urban) as shown in Fig. 2.

To carry out measurements, the decoder's antenna employed was Omni-directional, vertically polarized and stationed permanently on the top of a motor vehicle at a height of 2.4m beyond ground level. Also, at the top of OkoiArikpo House in Calabar (Fig.2), the transmitting aerial was installed omni-directional, 12-dBi, with a beam width of 3dB, and  $6^0$  polarizations. The antenna was installed on top of the building under consideration in Calabar, Cross River State, Nigeria at a height of 6.5 meter. During the measurements, the recorded time interval for impulse response of data was 0.1s, whereas the automobile was accelerating at a low continuous velocity of approximately 1.5 m/s along the road leading to the specified locations. Other rural and sub-urban locations selected for the study were Mfamosing, Akpabio, Odukpani and Akamkpa. On each route under investigation, ten designations were selected to examine the terrain, the signal path loss and topography. These made the total measurement points to be fifty. At the terminal point of each measurement route, a no-configured radio-return-journey was taken back to the transmitting point (OkoiArikpo House), from where a new trip commenced for the next route. The receiver module was again configured and activated to take the next measurement. Similar measurements were also carried out inside the buildings with the transmitter at one side and the receiver at adjacent side.

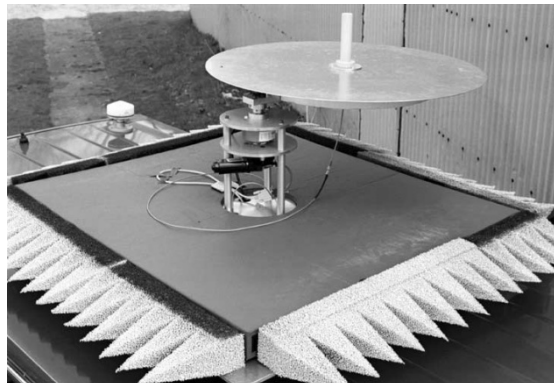


Fig.1: Photograph of the rotating antenna on the vehicle-roof.



Fig.2: Measurement location with the transmission point on the roof-top of the OkoiArikpo building, Calabar.

## IV. RESULTS AND DISCUSSION

The result is based on extensive sets of measurements data which can be used for validation of existing propagation models for residential and office blocks located in plantations. Table 1 to Table 5 are measured mean values of results obtained on signal strength and transmission loss.

In order to perform a meaningful comparison between the measured values and the predicted values, consideration was given on the uncertainties involved in a particular environment. From the study, both the measured and the predicted values were not exact. They consist of nominal values with varying uncertainty ranges. Besides, to



# International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 4, Issue 5, May 2016

quantify the accuracy of our propagation measurements, the empirical values were compared with earlier works done through measurements under similar environment. These values were further tested by calculating the standard-deviation (std. dev.) and the root-mean-square error (mse) between accessible figures (predicted or empirical) and measurement data reported in previous research work. Table 1, Table 2, Table 3 and Table 4 shows measured transmission characteristics for buildings located in Akamkpa, Ugep, Ikom and Calabar respectively. The Tables present empirical measurements with different ranges. Similarly, Table 5 presents compressed values for the attenuation coefficients of the locations under consideration.

Table 1: Measured Transmission Characteristics for Buildings at Akamkpa Urban.

<b>Building</b>	<b>Empirical <math>\alpha_b</math> (dB/m)</b>	<b>Range of <math>L_t</math> (dB)</b>
1	1.97	16-27
2	2.10	17-30
3	2.24	15-34
4	2.69	21-28
5	3.16	14-34
Average	2.43	17-31

Table 2: Measured Transmission Characteristics for Buildings at Ugep Urban.

<b>Building</b>	<b>Empirical <math>\alpha_b</math> (dB/m)</b>	<b>Range of <math>L_t</math> (dB)</b>
1	1.86	15-30
2	1.86	14-34
3	1.57	30-49
4	2.02	22-45
5	1.72	28-47
Average	1.88	22-41

Table 3: Measured Transmission Characteristics for Buildings at Ikom Urban.

<b>Building</b>	<b>Empirical <math>\alpha_b</math> (dB/m)</b>	<b>Range of <math>L_t</math> (dB)</b>
1	2.06	16-29
2	2.06	21-34
3	1.77	20-25
4	2.03	23-32
5	2.40	22-45
Average	1.99	21-32

Table 4: Measured Transmission Characteristics for Buildings at Calabar Urban.

<b>Building</b>	<b>Empirical <math>\alpha_b</math> (dB/m)</b>	<b>Range of <math>L_t</math> (dB)</b>
1	2.02	26-33
2	2.37	31-41
3	3.80	51-64
4	1.38	14-30
5	1.97	22-35
6	2.00	24-40
7	1.58	22-45
Average	2.15	24-41



# International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 4, Issue 5, May 2016

TABLE 5: Compressed Attenuation Coefficients for Examined Locations

Buildings	Categories	External dimensions			Attenuation coefficients
		Dist. (m)	Width (w)	Height (m)	$\alpha_b$ dB/m
1* (Akam)	1	73	9	9	2.24
2* (Ugep)	2	58	15	10	2.02
3* (Ikom)	3	36	12	9	2.03
4*	3	40	14	23	1.38
7* (Calabar)	4	102	18	15	1.58

From the results of the study as tabulated above, Calabar urban signal path loss values recorded measured mean signal path loss of 82.9dB, against a predicted path loss of 94.5dB. Further analysis indicated the value for path loss mean square error as 4.48dB, while the standard deviation was 4.42 dB. Characteristically, the urban city has a flat surface and high concentration of buildings.

Similarly, measured signal penetration recorded 5.9dB, as against predicted urban environmental path loss exponent range of 2.7 – 3.5 dB. The remarkable difference between measured and predicted values for Calabar urban is attributed to obstructions of the signal path due to buildings. Mfamosing is purely a suburb area with scanty low cost houses and rocky terrain. The only activity there is the multi-national cement company, UNICEM. In addition, the rural area is separated from the transmitter (OkoiArikpo House) by dense vegetation and clusters of trees spread along the 24.1 km distance. The mean signal strength recorded was -87.7 dBm, while signal penetration loss was 10.8dB, comparatively, these measured values deviated from the predicted values. This may be due to obstructions encountered by radio waves along the routes. Signal strength measurements for Akpabuyo, a rural enclave with signal path of 28.1km from the transmitter station was 85.3dBm, while signal penetration loss was 7.2 dB. Results from Odukpani and Akamkpa were 83.1dBm and 87.5dBm for signal strength, while signal path loss recorded 6.7dBm and 7.6dBm respectively. The difference between the signal penetration loss in Calabar (urban) and the other four locations can be attributed to clusters of trees and dense vegetation located along the signal path. The study showed that diversity of radio wave signals caused by multi-path fading is sometimes more than 20dB. Earlier researchers had also highlighted that path loss increases significantly when propagated from outdoor-to-indoor under the frequency range of 455MHz – 4.2 GHz [3]. [12], conducted experiment on penetration loss for seven diverse houses in a suburban region at Chicago. From the results he presented, 16.3dB was favorable in a succinct comparison with the typical penetration loss [3]. The value compared favorably with the average. Furthermore, [4] depicted that there is an observable decreases in penetration loss into suburban buildings as the frequency increases up to a range of 1-3 GHz range. According to him, the signal loss at this frequency was between 7dB to 8dB [3].

## V. CONCLUSION

Wireless transmission as observed from this study can possibly be affected by signal attenuation in vicinity where the transmitting and receiving radios are characterized by vegetation, thick forest and clusters of buildings. This may give rise to deteriorated signal strength and path loss.

Additionally, fluctuations of radio wave propagation occur because of the movement of receiving terminal. Obstacles between the transmitter and receiving terminal, adverse environmental conditions invariably resulted to signal fading, shadowing and path-loss. However, the study showed that propagation loss and signal strength levels were higher in locations with dense vegetation, high clusters of tree and sloppy topography.

Prediction of the expected mean values for mobile received power is critical in planning of a mobile radio network coverage for such vicinity. These shall assist innovators, operators, etc., to determine the coverage area for Base stations and the minimum reuse distance for Base stations. The study shall find application in propagation prediction for sub-urban and rural areas separated by vegetation and foliage.



# International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 4, Issue 5, May 2016

## REFERENCES

1. Andersen, J., Rappaport, T. & Yoshida, S., 'Propagation measurements and models for wireless communication channels', IEEE Comm. Mag. **33**: 42-49, 1995.
2. Andrew L. Martin. 'VHF and Microwave Propagation Characteristics of Ducts', Wireless Institute of Australia, January 17, XWE34. 2007.
3. Bassey, D. E., Okoro, R. C. and Okon, B. E., 'Modeling of Radio Waves Transmission of Building Located around Niger Delta Urban Microcell Environment Using " Ray Tracing Techniques"', International Journal of Science & Research, Vol 5, Issue 2, pp. 337-346, 2016.
4. Bassey, D. E., Ogbulezie, J. C. and R. Umunnah, 'Empirical Review of Basic Concepts of Teletraffic Postulates', International Journal of Scientific & Engineering Research, Vol. 7 Issue 3, pp. 1171-1186, 2016.
5. Bassey, D. E., Okon, B. E. and FaithPraise, F. O., 'Design and Construction of a GSM-Based Multipurpose Measuring Device for UHF Signal Strength Levels', International Journal of Science, Engineering & Technology Research, Vol 5, Issue 3, pp. 841-846, 2016.
6. Bassey, D. E., Okon, B. E. and Effiom, E. O., 'Broadband Network Penetration and Growth Pattern in North Eastern Part of Nigeria' International Journal of Scientific & Engineering Research, Vol 7, Issue 3, pp. 1156-1170, 2016.
7. Bassey, D. E., Okoro, R. C. and Okon, B. E., 'Issues Associated with Decimeter Waves Propagation at 0.6, 1.0 and 2.0 Peak Fresnel Zone Levels. International Journal of Science and Research Vol 5, Issue 2, pp. 159-164, 2016.
8. Bassey, D. E., Okoro, R. C. and Okon, B. E., 'Issues of Variance of Extreme Values in a Heterogenous Teletraffic Environment' International Journal of Science & Research, Vol 5, Issue 2, pp. 164-169, 2016.
9. Bassey, D. E., Ogbulezie, J. C. and Effiom, E. O., 'Local Area Network (LAN) Mock-up and the Prevention of Cybernetics Related Crimes in Nigermills Company using Firewall Security Device', International Journal of Scientific & Engineering Research, Vol 7, Issue 3, pp. 1124-1130, 2016.
10. Bassey, D. E., Ogbulezie, J. C. and Okon, B. E., 'Modeling a Low Latency IP Network in Nigeria' International Journal of Science, Engineering & Technology Research. Vol 5, Issue 3, pp. 830-834, 2016.
11. Bassey, D. E., Okon, B. E. and Effiom, E. O., 'Pilot Case Study of GSM - Network Load Measurement in Ikeja - Nigeria', International Journal of Science, Engineering & Technology Research, Vol 5, Issue 3, pp. 824-829, 2016.
12. Bassey, D. E., Okon, B. E. and Umunnah, R., 'The Security Implications of Virtual Local Area Network (VLAN), Niger Mills, Calabar, Nigeria', International Journal of Scientific & Engineering Research. Vol 7, Issue 3, pp. 1187-1194, 2016.
13. Bassey, D. E. and Okon, B. E., 'Comparative Studies Between Reduction of Discrete Frequency Ranges and Radiated Sound Levels (A Case Study of 50 kVA Diesel Engine Cooling Fan', International Journal of Engineering Research & Technology, Vol 4, Issue 9, pp. 429-437, 2016.
14. Bassey, D. E., Okoro, R. C. and Ogbulezie, J. C., 'Design Considerations of Different Segments of UHF Wireless Network in Cross River State, Nigeria', International Journal of Science, Engineering & Technology Research, Vol 5, Issue 3, pp. 835-840, 2016.
15. Bassey, D. E., Akpan, Aniefiok O. and Udoeno, E., 'UHF Wave Propagation Losses Beyond 40 Percent Fresnel Zone Radius in South-South Nigeria', International Journal of Science & Research (IJSR), Vol 5, Issue 2, pp. 470-475, 2016.
16. Hata, M. 'Empirical formula for propagation loss in land mobile radio services', IEEE Trans. Veh. Technol. **29**, pp. 317-325, 1980.
17. Ikegami, F., Takeuchi, T. and Yoshida, S. 'Theoretical prediction of mean field strength for urban mobile radio', IEEE Trans. Antennas Propag. **39**, pp. 299-302, 1991.
18. Ikegami, F., Yoshida, S., Takeuchi, T. and Umehira, M. "'factors controlling mean field strength on urban streets', IEEE Trans. Antennas, 1984.
19. Ling, J. and Moore, J. D. 'Radio propagation measurements and prediction using three-dimensional ray tracing in urban environments at 908 MHz and 1.9 GHz', IEEE Trans. Veh. Technol. **48**, pp. 931-946, 1999.

## BIOGRAPHY

**Donatus E. Bassey** is a Senior Lecturer in the Electronics and Computer Technology Unit, Department of Physics, University of Calabar, Calabar, Nigeria. He received Doctor of Philosophy (Ph.D.) degree in 2006 from University of Calabar, Calabar, Nigeria. His research interest are in Telecommunications, Acoustics, Electronics and Instrumentation etc.