



IJIRCCCE

e-ISSN: 2320-9801 | p-ISSN: 2320-9798



INTERNATIONAL JOURNAL OF INNOVATIVE RESEARCH


IN COMPUTER & COMMUNICATION ENGINEERING

Volume 9, Issue 6, June 2021

ISSN INTERNATIONAL
STANDARD
SERIAL
NUMBER
INDIA

Impact Factor: 7.542

 9940 572 462

 6381 907 438

 ijircce@gmail.com

 www.ijircce.com

A Novel Method to Improve Performance of Diffusive Molecular Communication Systems with On-Off Keying Modulation

M.Pooja¹, Mr K. Balaji², Mrs .K.Periyarselvam³

PG Scholar, Dept. of ECE, GRT Institute of Engineering and Technology, Tiruttani, Tamilnadu, India¹

Associate Professor, Dept. of ECE, GRT Institute of Engineering and Technology, Tiruttani, Tamilnadu, India²

Assistant Professor, Dept. of ECE, GRT Institute of Engineering and Technology, Tiruttani, Tamilnadu, India³

ABSTRACT: The Bit Error Rate (BER) of the diffusive molecular communication (DMC) systems employing on-off keying (OOK) modulation. We also analyze the BER of the OOK-modulated DMC systems with inter-symbol interference cancellation (ISIC). Our main motivation is to introduce alternative tools for analyzing and efficiently computing the BER of the DMC systems without or with ISIC. Specifically, for the OOK-modulated DMC systems without ISIC, we first derive an exact BER expression based on the Poisson modeling of DMC systems. Then, the Gaussian- and Gamma-approximation approaches are introduced to approximate the discrete Poisson distribution, and based on the approximation approaches, the corresponding BER expressions are derived.

I. INTRODUCTION


Diffusion-based molecular communication (DMC) is a promising technique for nano networks. The main objective of this paper is to evaluate the error performance of DMC employing pulse-based modulation scheme. We derive closed-form expressions for error probability using energy detection and amplitude detection techniques. The error performance model accounts for diffusion noise and inter symbol interference (ISI) effects. We compare the performance of both detection techniques along with investigating the effect of different parameters on error performance. We also evaluate the channel capacity of pulse modulated DMC.

II. DIFFUSIVE MOLECULAR COMMUNICATION

Molecular communications systems use the presence or absence of a selected type of molecule to digitally encode messages. The molecules are delivered into communications media such as air and water for transmission. The technique also is not subject to the requirement of using antennas that are sized to a specific ratio of the wavelength of the signal. Molecular communication signals can be made biocompatible and require very little energy.

III. MODULATION

In the diagram, a sine wave (red curve) is sampled and quantized for PCM. The sine wave is sampled at regular intervals, shown as vertical lines. For each sample, one of the available values (on the y-axis) is chosen. The PCM process is commonly implemented on a single integrated circuit called an analog-to-digital converter (ADC). This produces a fully discrete representation of the input signal (blue points) that can be easily encoded as digital data for storage or manipulation. Several PCM streams could also be multiplexed into a larger aggregate data stream, generally for transmission of multiple streams over a single physical link. One technique is called time-division multiplexing (TDM) and is widely used, notably in the modern public telephone system.

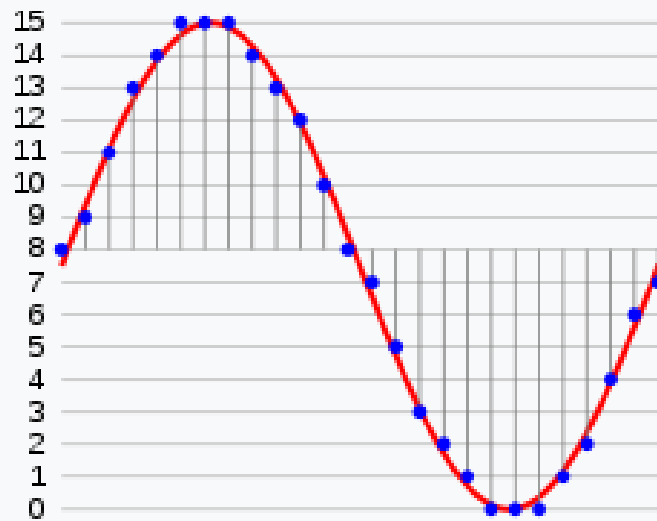

Sampling and quantization of a signal (red) for 4-bit LPCM

DEMODULATION

To recover the original signal from the sampled data, a "demodulator" can apply the procedure of modulation in reverse. After each sampling period, the demodulator reads the next value and shifts the output signal to the new value. As a result of these transitions, the signal has a significant amount of high-frequency energy caused by aliasing. To remove these undesirable frequencies and leave the original signal, the demodulator passes the signal through analog filters that suppress energy outside the expected frequency range (greater than the Nyquist frequency). The sampling theorem shows PCM devices can operate without introducing distortions within their designed frequency bands if they provide a sampling frequency twice that of the input signal. For example, in telephony, the usable voice frequency band ranges from approximately 300 Hz to 3400 Hz. Therefore, according to the Nyquist-Shannon sampling theorem, the sampling frequency (8 kHz) must be at least twice the voice frequency (4 kHz) for effective reconstruction of the voice signal.

The electronics involved in producing an accurate analog signal from the discrete data are similar to those used for generating the digital signal. These devices are Digital-to-analog converters (DACs). They produce a voltage or current (depending on type) that represents the value presented on their digital inputs. This output would then generally be filtered and amplified for use.

CHANNEL INTERLEAVER

Interleavers and Deinterleavers are designed and used in the context of characteristics of the errors that might occur when the message bits are transmitted through a noisy channel. To understand the functions of an interleaver/deinterleaver, understanding of error characteristics is essential. Two types are errors concern communication system design engineer. They are burst error and random error.

INTER-SYMBOL INTERFERENCE CANCELLATION

In telecommunication, intersymbol interference (ISI) is a form of distortion of a signal in which one symbol interferes with subsequent symbols. This is an unwanted phenomenon as the previous symbols have similar effect as noise, thus making the communication less reliable. The spreading of the pulse beyond its allotted time interval causes it to interfere with neighboring pulses. ISI is usually caused by multipath propagation or the inherent linear or non-linear frequency response of a communication channel causing successive symbols to "blur" together.


The presence of ISI in the system introduces errors in the decision device at the receiver output. Therefore, in the design of the transmitting and receiving filters, the objective is to minimize the effects of ISI, and thereby deliver the digital data to its destination with the smallest error rate possible.

Ways to alleviate intersymbol interference include adaptive equalization and error correcting codes.

COUNTERING ISI

There are several techniques in telecommunication and data storage that try to work around the problem of intersymbol interference.

- Design systems such that the impulse response is short enough that very little energy from one symbol smears into the next symbol.
- Separate symbols in time with guard periods.
- Apply an equalizer at the receiver, that, broadly speaking, attempts to undo the effect of the channel by applying an inverse filter.
- Apply a sequence detector at the receiver, that attempts to estimate the sequence of transmitted symbols using the Viterbi algorithm.

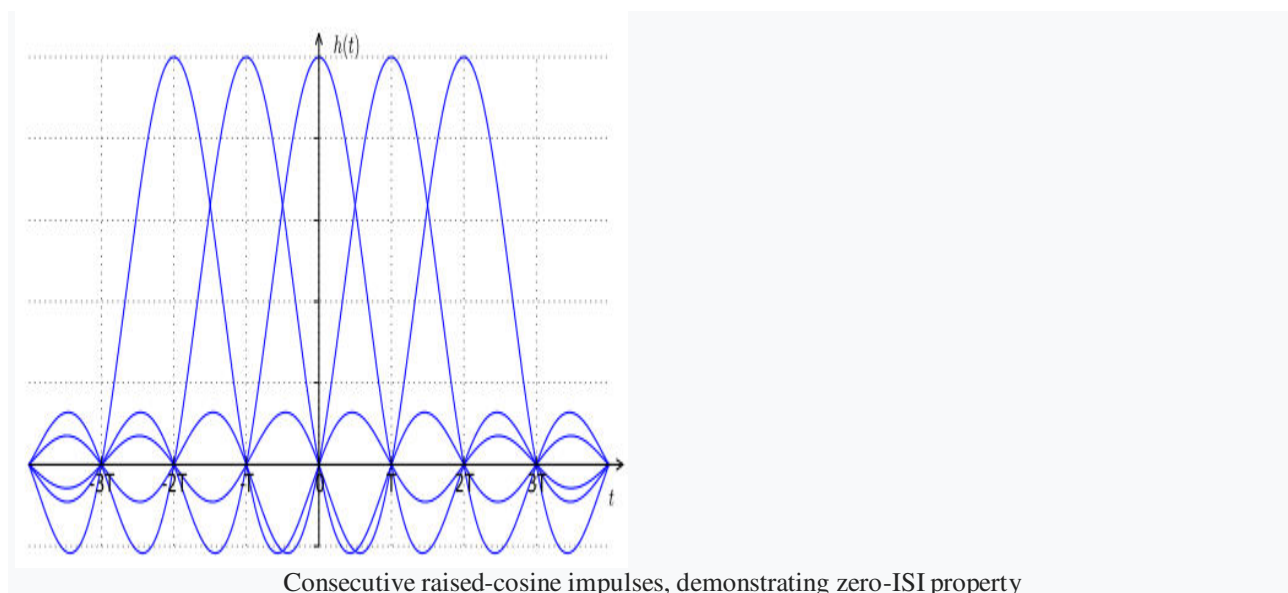

IV. CONCLUSION

We have proposed a range of approaches for analyzing and to compute the BER of the DMC systems without or with ISIC, based on which exact and approximate BER expressions have respectively been derived. Our studies and comparison show that both the Gaussian- and Gamma-approximation are capable of providing near-accurate BER estimation, provided that the respective optimum thresholds are applied in detection. However, the optimum detection threshold estimated by the Gaussian- or Gamma-approximation is explicitly different from that given by the Poisson modeling, and hence it is practically not optimum. The efficiency of the system is analyzed thro Bit Error Rate Analysis.

REFERENCES

- [1]. K. Morioka, J.-H. Lee, and H. Hashimoto, "Human-following mobile robot in a distributed intelligent sensor network," *IEEE Trans. Ind. Electron.*, vol. 51, no. 1, pp. 229–237, Feb. 2004.
- [2]. Y. Matsumoto and A. Zelinsky, "Real-time face tracking system for human-robot interaction," in *1999 IEEE International Conference on Systems, Man, and Cybernetics, 1999. IEEE SMC '99 Conference Proceedings, 1999*, vol. 2, pp. 830–835 vol.2.
- [3]. T. Yoshimi, M. Nishiyama, T. Sonoura, H. Nakamoto, S. Tokura, H. Sato, F. Ozaki, N. Matsuhira, and H. Mizoguchi, "Development of a Person Following Robot with Vision Based Targe Detection," in *2006 IEEE/RSJ International Conference on Intelligent Robots and Systems, 2006*, pp. 5286–5291.

- [4]. H. Takemura, N. Zentaro, and H. Mizoguchi, "Development of vision based person following module for mobile robots in/out door environment," in 2009 IEEE International Conference on Robotics and Biomimetics (ROBIO), 2009, pp.
- [5] HC-06 bluetooth module , <http://www.Lanwind.com/files/hc-06en.pdf>.
- [6] Arduino, ios, android and technology titbits, <http://sree.cc/google/android/using-bluetooth-in-android>.
- [7] Smart phones android operated robot.
- [8]Bluetooth based android phone/tablet controlled robot, <http://www.robokits.co.in> and <http://www.robokitworld.com>
- [9] Gurjashan Singh Pannu, Mohammad Dawud Ansari, Pritha Gupta. Design and Implementation of Autonomous Car using Raspberry Pi. International Journal of Computer Applications (0975 – 8887) Volume113 – No. 9, March 2015.
- [10] Ayush Wattal, Ashutosh Ojha, Manoj Kumar. Obstacle Detection for Visually Impaired Using Raspberry Pi and Ultrasonic Sensors. National Conference on Product Design (NCPD 2016), July 2016.
- [11] Mr. T. P. Kausalya Nandan, , S. N. Anvesh Kumar, M. Bhargava, P.Chandranth, M. Sairani. Controlling Obstacle Avoiding And Live Streaming Robot Using Chronos Watch. International Sensing and Intelligent Systems, vol. 5, no. December Journal of Engineering Innovation & Research Volume 5, Issue 2, ISSN: 2277 –5668
- [12] Xiaodong Miao, Shunming Li & Huan Shen, On-Board lane detection system for intelligent vehicle based on monocular vision, International Journal on Smart Sensing and Intelligent Systems, vol. 5, no. 4, December2012, pp. 957-972.
- [13] A. Bar Hillel, R. Lerner, D. Levi, & G. Raz. Recent progress in roadand lane detection: a survey. Machine Vision and Applications, Feb.2012, pp. 727–74
- [14] Narathip Thongpan, & Mahasak Ketcham, The State ofthe Art in Development a Lane Detection for Embedded Systems Design,Conference on Advanced Computational Technologies & Creative Media(ICACTCM'2014) Aug. 14-15, 2014
- [15] Narayan Pandharinath Pawar & Minakshee M. Patil, Driver Assistance System based on Raspberry Pi, International Journal of Computer Applications (0975 –8887) Volume 95– No.16, June 2014, pp.36-39. [10] J.M.A. Alvarez, A.M. Lopez & R. Baldrich, IlluminantInvariant Model-Based Road Segmentation. Intelligent TransportationSystems, IEEE Transactionson, 12, 2008, pp 184–193.68
- [16] Suraj Bhatia,Jatin Bajaj, M. Mani Roja "Technology, Systems and Implementation of a Smart Home Automation System: A Review" IJCTA Sept-Oct 2014, ISSN:2229-6093.
- [17] Dhawan S. Thakur and Aditi Sharma, "Voice Recognition WirelessHome Automation System Based On Zigbee", in IOSR Journal of Electronics and Communication Engineering (IOSR-JECE), Volume 6,Issue 1, May. - Jun. 2013
- [18] Akanksha Singh, Arijit Pal, Bijay Rai, "GSM Based HomeAutomation, Safety and Security System Using Android Mobile Phone" in International Journal of Engineering Research & Technology (IJERT),Vol. 4 Issue 05, May-2015.
- [19] Rajeev Piyare, "Internet of Things: Ubiquitous Home Control and Monitoring System using Android based Smart Phone", International Journal of Internet of Things 2013, Vol 2,No 1, pp.5-11.
- [20] Dinkar R Pataki, A Comparative Study of Arduino, Raspberry Pi and ESP8266 as IoT Development Board, International Journal of AdvancedResearch in Computer Science, Vol 8, No. 5, May-June 2017,pp: 2350-2352.
- [21] R. A. Ramlee, M. H. Leong, R. S. S. Singh, M. M. Ismail, M. A.Othman, H. A. Sulaiman, et al., "Bluetooth remote Home AutomationSystem Using Android Application", The International Journal of Engineering And Science, Vol. 2, pp. 149-153, 11, January 2013.
- [22] Chirag Atha, Kshitij Baranwal, Varad Desai, Sunil Wankhade,Review Paper on Home Automation System using Raspberry PI,International Journal on Recent and Innovation Trends in Computing andCommunication, Vol. 4, Issue 10, pp. 168 – 172, ISSN: 2321-8169.



INNO  **SPACE**
SJIF Scientific Journal Impact Factor
Impact Factor: 7.542



ISSN INTERNATIONAL
STANDARD
SERIAL
NUMBER
INDIA



INTERNATIONAL JOURNAL OF INNOVATIVE RESEARCH

IN COMPUTER & COMMUNICATION ENGINEERING

 **9940 572 462**  **6381 907 438**  **ijircce@gmail.com**



www.ijircce.com

Scan to save the contact details