

e-ISSN: 2320-9801 | p-ISSN: 2320-9798



## INTERNATIONAL JOURNAL OF INNOVATIVE RESEARCH

IN COMPUTER & COMMUNICATION ENGINEERING

Volume 9, Issue 4, April 2021



Impact Factor: 7.488





| e-ISSN: 2320-9801, p-ISSN: 2320-9798| www.ijircce.com | | Impact Factor: 7.488 |

|| Volume 9, Issue 4, April 2021 ||

| DOI: 10.15680/IJIRCCE.2021.0904053 |

# IoT Based Military Health Service In Battle Field

Janani.N<sup>1</sup>, Ajith.A<sup>2</sup>, Sathishkumar.T<sup>3</sup>, Mr.R.Vijayakumar<sup>4</sup>
UG Student, Dept. of ECE, Paavai Engineering College, Namakkal, Tamilnadu, India<sup>1,2,3</sup>
Assistant Professor, Dept. of ECE., Paavai Engineering College, Namakkal, Tamilnadu, India<sup>4</sup>

ABSTRACT: Nowadays all nations keep its security at highpriority. Wars are being fought for land, water and acquiring theposition of most powerful nation. A country's arm forces consistof three professional uniformed services: the army, the navy, andthe air force. Soldiers being the backbone of any armed forceusually lose their lives due to lack of medical help when inemergency, also soldiers who are involved in missions or inspecial operations get straggled on war fields and lose contactwith the authorities. To overcome this concerns we had build thisproject which, using wireless body area sensor network(WBANS) such as temperature sensor, heartbeat sensor etc. Will monitor the health status of the soldier whenever required. Alsousing GPS we can track the soldier's exact location wheneverrequired. Using oxygen level sensor we can also monitor theenvironmental condition, so authorities can provide essentialaids. The communication is established between the soldiers andauthorities via GSM. Any abnormalities in the readings of wireless body area sensor network (WBASNs) is considered as atrigger for GSM to establish the connection between the soldierand base unit and send current location and health status to thereceiver. By using all this equipments we had tried to implement and precise device.

**KEYWORDS**: Arduino Board, GPS, GSM modem, temperature sensor.

#### I. INTRODUCTION

Indian soldiers are mainly known for their courage, in spite of scarce ammunitions and safety measures, they have many triumphs to their credits. All must be really concerned about the safety of the soldiers, so we have decided to build a project which will efficiently keep a check on the health status of the soldier, and his precise location to equip him with necessary medical treatments as soon as possible. Soldier's tracking is done using GPS and GSM is used to provide wireless communication system. For monitoring the health parameters of soldier we are usingbio medical sensors such as temperature sensor and heart beat sensor. An oxygen level sensor is used to monitor atmospheric oxygen so if there are any climatic changes the soldiers will be equipped accordingly. The infantry soldier of tomorrow promises to be one of the most technologically advanced modern warfare has ever seen. Around the world, various research programs are currently being conducted, such as the United States' Future Force Warrior (FFW) and the United Kingdom's Future Infantry Soldier Technology (FIST), with the aim of creating fully integrated combat systems. Alongside vast improvements in protective and weaponry subsystems, another major aspect of this technology will be the ability to provide information superiority at the operational edge of military networks by equipping the dismounted soldier with advanced visual, voice, and data communications.

#### II. RELATED WORK

Helmet mounted visors, capable of displaying maps and real-time video from other squad members, ranges of physiological sensors display the heartbeat, body temperature, atmosphere pressure, surrounding oxygen level etc. Thesedevices will improve awareness for collateral militarypersonnel as well as who will exchange information usingwireless networks along with host. The challenge was tointegrate these piecemeal components into a lightweight package that could achieve the desired result without being toobulky and cumbersome or requiring too much power. Communicating with the base (control room) station becomethe fundamental challenges in military operations also the proper navigation between soldier's organizations playsimportant role forcareful planning and co-ordination. So this paper focus on tracking the location of soldierfrom GPS, which isuseful for control room station to knowthe exact location of soldier and accordingly they will guide them. Also High-speed ,short-range, soldier-to-soldierwireless communications to relay information on situationalawareness, such as Bio-medical sensors, GPS navigation, Wireless communication.



| e-ISSN: 2320-9801, p-ISSN: 2320-9798| www.ijircce.com | | Impact Factor: 7.488 |

|| Volume 9, Issue 4, April 2021 ||

| DOI: 10.15680/IJIRCCE.2021.0904053 |

#### PROPOSED SYSTEM

After considering the above technologies the tracking of soldieran navigation between soldier to soldier such as Knowing their speed, distance, height as well as health status of them during the war, which enables the army personal to plan the war strategies. Base staton gets location of soldier from GPS. The base station can access the current status of the soldier which is displayed on the phone with the help of GSM and hence appropriate actions can be found.

#### III. SYTEM ANA LYSIS

System analysis is the act, process of profession of studying an activity typically by mathematically means in order to define its goals or purposes and discover operation and procedures for accomplishing them most efficiently.

#### IV. HARDWARE REQUIREM ENTS

The hardware requirements for the system are as follows

a. Pulse Sensor:



Figure 1: Pulse Sensor

The sensor used in this project is pulse sensor-SEN-11574. Heart rate data can be really useful for determining the health status of a person. The pulse sensor amped is a plug and play heart rate sensor for arduino. It essentially combines a simple optical heart rate sensor with amplification and noise cancellation circuitry making it fast and easy to get reliable pulse readings. It sips power with just 4 mA current draw at 5V. To use it simply clip the pulse sensor to earlobe or fingertip.

#### b. Temperature Sensor



Figure 2: Temperature sensor

Type T (copper constantan) thermocouples are suited for measurements in the range 200 to 350 degree Celsius. Often used as a differential measurement, since only copper wire touches the probes. This series are precision integrated

#### International Journal of Innovative Research in Computer and Communication Engineering



| e-ISSN: 2320-9801, p-ISSN: 2320-9798| www.ijircce.com | | Impact Factor: 7.488 |

|| Volume 9, Issue 4, April 2021 ||

| DOI: 10.15680/IJIRCCE.2021.0904053 |

circuit temperature devices with an output voltage linearly proportional to the centigrade temperature. The LM35 device has an advantage over linear temperature sensor calibrated in Kelvin, as the user is not required to subtract a Large constant voltage from the output to obtain convenient centigrade scaling. To find the health status of soldier base station should know the body temperature and pulse rate of] the soldier. So we are using LM35 body biosensor as it is a low cost temperature sensor and it does not require signal conditioning. The LM35 generates a higher output voltage than thermocouples and may not require that the output voltage be amplified. As the temperature increase above the specified value the GSM module will immediately alert the Base station and thus will not wait for heart beats to go out of the normal range.

#### c. Power supply:

The most important section in every electronic circuit is the power supply. For the proper working of all components an unaltered power supply is needed. The supply must be capable of providing the necessary power for each component. At the same time the protection from over voltage must be there. The basic step in the designing of any system is to design the power supply required for that system. The designing of power supply requires the total current that the system sinks from the supply and the voltage rating required for the different components. In this project work following power supplies is used: 1. 5V constant power supply for GPS, GSM Module and LCD section. 2. Constant voltage regulator LM7805. 3. Variable voltage regulator LM317 for ARM microcontroller LM317.

#### d. Arduino Board



Figure: 3 Arduino board

Microcontrollers are one of the major components in any embedded system. A microcontroller is a small computer on a single integrated circuit containing a processor core, memory and programmable input/output peripherals. Microcontrollers work according to the program written inside its program memory. The major use of these single chip computers are in automatic responding devices. The function of this section is to collect the information about heart beat of the soldier, atmospheric temperature and location of the soldier in each minute. Then it sends this information to the base unit. The ATmega328 is a single –chip microcontroller created byATmega in the mega AVR family. The Atmel 8-bit RISCbased microcontroller combines 32kB ISP flash memorywith read-while-write capabilities, 1KB EEPROM, 2kB SRAM, 23 general purpose I/P lines, 32 general purposeworking registers, three flexible timer/counter with compare modes, internal and external interrupts, serial programmable USART, a byte-oriented 2-wire serial interface, 6-channel 10-bit A/D converter programmable watchdog timer with internal oscillator, and five software selectable power saving modes. The device operates between 1.8-5.5 volts. The device achieves throughput approaching 1 MIPS per MHz.

#### d. GPS Modem

The Global Positioning System (GPS) is a space-based global navigation satellite system that provides reliable location and time information in all weather and at all times and anywhere on or near the Earth when and where there is an unobstructed line of sight to four or more GPS satellites.



| e-ISSN: 2320-9801, p-ISSN: 2320-9798| www.ijircce.com | | Impact Factor: 7.488 |

|| Volume 9, Issue 4, April 2021 ||

| DOI: 10.15680/IJIRCCE.2021.0904053 |

#### System Block Diagram

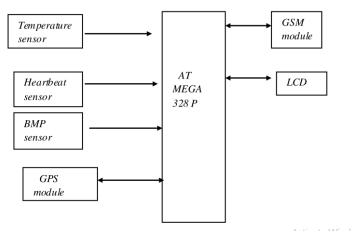


Figure 4: Block Diagram

#### PHYSIOLOGICAL SIGNALS AND BIOSENSOR

With recent advances in technology, various wearable sensors have been developed for the monitoring of human Physiological Parameters. The various sensing technologies are available, which can be integrated as a part of health monitoring system, along with their corresponding measuredphysiological signal. The measurement of these vital bio signal and their subsequent processing for feature extraction, lead to collection of real time gathered parameter which can give an overall estimation of health condition at any real time There are a number of medical parameters of soldier. That can be monitored, like ECG, EEG, Brain Mapping, etc. But these require complex circuitry and advanced medical facilities and hence they cannot be carried around by the soldier. The entire system would become bulky for the soldier.

#### Flow chart

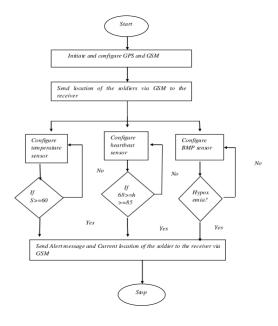


Figure 5: flow chart

#### SOFTWARE REQUIREMENTS

- Compiler
- MC Programming Language: C

#### International Journal of Innovative Research in Computer and Communication Engineering



| e-ISSN: 2320-9801, p-ISSN: 2320-9798| www.ijircce.com | | Impact Factor: 7.488 |

|| Volume 9, Issue 4, April 2021 ||

| DOI: 10.15680/IJIRCCE.2021.0904053 |

#### V.RESULT AND CONCLUSION

The result is as shown below. A message is send on the registered number confirming about GSM and GPS configuration. Later as the normal body parameters deviates an alert message is send to base station along with the precise location of the soldier. Following conclusion can be retrieved from above implementation are:

□□Soldiers Security and safety: GPS tracks position of soldier anywhere on globe and also health system monitors
soldier's vital health parameters and environmental situation which provide security and safety for soldiers.
□□Less complex circuit and less power consumption: Use of PIC processor and low power requiring peripherals
reduce overall power usage of system.

#### VI.FUTURE ENHANCEMENT

We can dial an emergency call if the soldier health parameters crosses threshold value or soldier co-ordinates Goes out of a certain / pre-decided track.

#### REFERENCES

- 1. P.chakravarth, S.Natarajan, M.Anto Bennete "GSM based soldiertracking system and monitoring using wireless communication" Department of Electronics and Communication, published in September 1st ,2017.
- 2. Akshita v.Armarkar, Deepika J, Punekar, Mrunali, p.Kapse, ShwetaKumari, Jayshree Shelka "Soldier health and position trackingsystem" Department of ETC engineering, volume 7 issue no..3
- 3. Patil Akshay, Shelake Balaji, Pinjari Raju, Mirajkar P.P "GPSbased soldier tracking and health monitoring", Department of ETCengineering, volume 40 issue:03 March 2017.
- 4. Shruthi Nikam, Supriya Patil, Prajkata Powar, V.S.Bendre "GPSbased soldier tracking and health indication system", Department of E&TC, PIMPRI CHINCHWA COLLEGE OF ENGINEERING, volume 2, issue 3, March 2013.
- 5. Govindiraj A, Dr.S.Sindhurja Banu "GPS based soldier tracking andhealth indication system with environmental analysis", Departmentof Electronics and Communication Engineering volume 2, issue 12,Decemember 2013.
- 6. Zeeshan Raza, Kamaran Liaquat, Shahazad Ashraf "Monitoring of soldier health and transmition of secret codes", NFC instutation of engineering volume 8 no 2, june 2017.
- 7. Shubhangi Gupta, Shivani Kulshrestha, Divya Singh, Ashish Kumar, Er. Hitendra Singh "GPS and GSM based soldier health monitoring and tracking system" issue 3 volume 6, March 2017.
- 8. JouniRantakoko, Joakim Rydell and peter Sromback, "Accurate and Realiable soldier and first responder Poasitioning :Multisensor System and co-operative localization" April 2011
- 9. RavidraB.Sathe ,A.S.Bhide. "Gps-based soldier tracking and healthmonitoring system" conference on Advances in communication and computing April 2011-12.
- 10. VincentPereira, Audrey Giremus, anderic grivel "Modeling of multipath environment using copulas For particle filtering based GPS Navigation" June-2012
- 11. Shruti Nikam1, Supriya Patil2, Prajkta Powar3, V.S.Bendre-" Gpsbasedsoldier tracking and health indication system"InternationalJournal of Advanced Research in Electrical, Electronics and Instrumentation Engineering. Vol. 2, Issue 3, March 2013.
- 12. Akshita v.Armarkar, Deepika J, Punekar, Mrunali, p.Kapse, ShwetaKumari, Jayshree Shelka "Soldier health and position trackingsystem" Department of ETC engineering, volume 7 issue no..3
- 13. Patil Akshay , Shelake Balaji, Pinjari Raju, Mirajkar P.P "GPSbased soldier tracking and health monitoring", Department of ETCengineering, volume 40 issue:03 March 2017.
- 14. Shruthi Nikam, Supriya Patil, Prajkata Powar, V.S.Bendre "GPSbased soldier tracking and health indication system", Department of E&TC, PIMPRI CHINCHWA COLLEGE OF ENGINEERING, volume 2, issue 3, March 2013.
- 15. Govindiraj A, Dr.S.Sindhurja Banu "GPS based soldier tracking andhealth indication system with environmental analysis", Departmentof Electronics and Communication Engineering volume 2, issue 12,Decemember 2013.
- 16. Zeeshan Raza, Kamaran Liaquat, Shahazad Ashraf "Monitoring of soldier health and transmition of secret codes", NFC instutation of engineering volume 8 no 2, june 2017.
- 17. Shubhangi Gupta, Shivani Kulshrestha, Divya Singh, Ashish Kumar, Er. Hitendra Singh "GPS and GSM based soldier health monitoring and tracking system" issue 3 volume 6, March 2017.
- 18. JouniRantakoko, Joakim Rydell and peter Sromback, "Accurate and Realiable soldier and first responder Poasitioning : Multisensor System and co-operative localization" April 2011

#### International Journal of Innovative Research in Computer and Communication Engineering



| e-ISSN: 2320-9801, p-ISSN: 2320-9798| <u>www.ijircce.com</u> | | Impact Factor: 7.488 |

|| Volume 9, Issue 4, April 2021 ||

| DOI: 10.15680/IJIRCCE.2021.0904053 |

19.RavidraB.Sathe ,A.S.Bhide. "Gps-based soldier tracking andhealth monitoring system" conference on Advances in communication and computing April 2011-12.

20. Vincent Pereira, Audrey Giremus, and eric grivel "Modeling ofmultipath environment using copulas For particle filtering basedGPS Navigation" June-2012











### INTERNATIONAL JOURNAL OF INNOVATIVE RESEARCH

IN COMPUTER & COMMUNICATION ENGINEERING







📵 9940 572 462 🔯 6381 907 438 🔯 ijircce@gmail.com

