



**IJIRCCCE**

e-ISSN: 2320-9801 | p-ISSN: 2320-9798



# INTERNATIONAL JOURNAL OF INNOVATIVE RESEARCH

IN COMPUTER & COMMUNICATION ENGINEERING

Volume 9, Issue 4, April 2021

**ISSN** INTERNATIONAL  
STANDARD  
SERIAL  
NUMBER  
INDIA

**Impact Factor: 7.488**

 9940 572 462

 6381 907 438

 [ijirccce@gmail.com](mailto:ijirccce@gmail.com)

 [www.ijirccce.com](http://www.ijirccce.com)

# Detection of Buildings Health using Hybrid Data Optimization

**Shweta Shenmare, Neha Mogre, Dr. Narendra Chaudhari**

PG Student, Dept. of CSE., TGPCET, RTMNU, Nagpur, India

Assistant Professor, Dept. of CSE., TGPCET, RTMNU, Nagpur, India

Head of Department, Dept. of CSE., TGPCET, RTMNU, Nagpur, India

**ABSTRACT:** Detecting and analyzing cracks is an important task during the phase of building condition survey. The conventional manual process of crack detection is very time-consuming and susceptible to subjective judgments of inspectors. This study establishes a program, named as Surface Crack Analysis, based on image processing techniques for automatic crack recognition and analyses. The program employs a gray intensity adjustment method, called Min-Max Gray Level Discrimination (M2GLD), for image enhancement and Otsu method for image binarization. Experimental results show that the program can successfully detect cracks in digital images. Hence, the newly constructed program can be an alternative for building management agencies in the task of building condition survey.

**KEYWORDS:** Crack Detection; Image Binarization; Building Survey; Crack Analysis.

## I. INTRODUCTION

Cracking on surface of structure has always been a major concern of building owners as well as structural engineers. It is because cracks may strongly affect the safety, durability, and serviceability of structures. Cracks bring about the reduction in the effective loading area which leads to the increase of stress and subsequently failure of the concrete or other structures. Especially for concrete elements, cracks create access to harmful and corrosive chemicals to penetrate into building structures, which consequently deteriorate their integrity as well as esthetics.

As pointed out by previous studies, surface cracks are critical indicators of structural damage and durability of all types of structure. Thatoi et al. and Koch et al. stated that it is crucial to visually inspect the building elements to recognize cracks and assess the physical and functional condition. Nevertheless, the task of crack detection in building in developing countries like Vietnam is often performed manually. Thus, to obtain the measurements of cracks and to compile or process relevant data requires a significant amount of labor time and cost. Moreover, inspection by means of human vision is inefficient in terms of both cost and accuracy because it involves the subjective judgments and experience of the building inspectors. Therefore, a fast and reliable surface crack detection and analysis by means of image processing techniques is highly helpful to boost the productivity of the traditional way of building inspection. Recent review works pointed out an increasing trend of applying image processing techniques for detecting crack in structures.

These review works point out that evaluating the visual condition of vertical and horizontal structural elements become a vital part of civil engineering. The information of cracks can be employed for deeper diagnosis and to aid the decision making process regarding rehabilitation method selection to fix the damaged structures. Among image processing techniques, image binarization is very suitable to be used for crack detection because cracks have distinguishable lines and curves. The widely employed method of image binarization is the Otsu algorithm. Although this algorithm has solid mathematical background and acceptable performance in many cases, applying the standard Otsu binarization method on real-world images of structures often cannot yield satisfactory outcomes. It is because image binarization depends on the image quality, characteristics of the background surface as well as associated parameters. Real-world images also suffer from difficulties including low contrast, uneven illumination, noise pollution, existence of shading, blemishes, or concrete spall in images. Hence, improvement or modification to the standard Otsu method for image binarizing is necessary.

The proposed program automatically recognize crack pixels out of image background but also perform various measurements of crack characteristics including the area, width, and orientation. An image enhancement



algorithm called Min-Max Gray Level Discrimination (M2GLD) is employed to preprocess the images so that it is able to obtain more accurate crack detection outcomes.

## II. RESEARCH METHEDODOLOGY

### 1.Otsu Method for Image Binarization:

The Otsu's approach is a widely employed for image thresholding. The fundamental idea of the Otsu's approach is to categorize the pixels of a digital image into two groups: the object of interest and the background. The separated object is featured by  $\omega_0$  and  $\mu_0$  which are the ratio of the number of pixels and the average gray level. Similarly, background of the image also has the two parameters of  $\omega_1$  and  $\mu_1$ . Thus, the total mean of gray level of the image is defined as follows:

$$\mu = \omega_0(t) \cdot \mu_0(t) + \omega_1(t) \cdot \mu_1(t),$$

where  $t$  denotes a gray level of the image.

The value of the gray level  $t_{op}$  corresponding to the maximal value of  $f_s$  is chosen as the thresholding value for image binarization. In fact, if the histogram of the gray level of the image has two separable peaks, the Otsu method is capable of locating an optimum value of  $t_{op}$  locating between two peaks correctly. Nevertheless, in unimodal and close-to unimodal histograms of images, this method may encounter difficulties in identifying a satisfying value of  $t_{op}$ .

### 2.Min-Max Gray Level Discrimination for Image Enhancement:


Because of the specific characteristic of cracks that consist of distinguishable lines and curves, the gray-scale value of the crack is often a local minimum within an image. In order to separate the pixels of the image into crack and non-crack groups, a simple technique called Min-Max Gray Level Discrimination (M2GLD) is employed as an image preprocessing step before the Otsu method is used for image binarization.


Let  $I_0(m,n)$  be the gray intensity of pixel at the coordination  $(m, n)$  within an, this gray intensity of the image is transformed using the following rules:

$$IA(m,n) = \min(I_{0\_max}, I_0(m,n).RA) \quad \text{if} \quad I_0(m,n) > I_{0\_min} + \tau.(I_{0\_max} - I_{0\_min})$$

$$IA(m,n) = \max(I_{0\_min}, I_0(m,n).RA^{-1}) \quad \text{if} \quad I_0(m,n) < I_{0\_min} + \tau.(I_{0\_max} - I_{0\_min})$$

where  $IA(m,n)$  is the adjusted gray intensity of the pixel at position  $(m,n)$ .  $RA$  denotes the adjusting ratio.  $I_{0\_max}$  and  $I_{0\_min}$  represent the maximum and minimum values of the gray intensity. This section of the article describes the basic structure of the proposed image processing system designed for detecting surface crack in building structure. The model has been developed with ease to recognize and analyze cracks on architecture is shown in **Fig. 1**. The interface of the program is illustrated in **Fig. 2**. The original image is first processed by a median filter with a window size of 3x3 pixels. Median filter can significantly help to smooth the image to cast out unwanted dot noise. The image is subsequently preprocessed by the M2GLD algorithm and then binarized by the Otsu method. Based on the binarized image, the properties of cracks are analyzed. First, the area of a crack object is simply computed as the total number of pixels located within the object boundary. Second, the crack orientation calculation can be boiled down to a simple linear regression problem within which the independent variable is the pixel position along  $X$  axis and the dependent variable is the pixel position along  $Y$  axis. The orientation of the crack is estimated via the slope of the regression line.

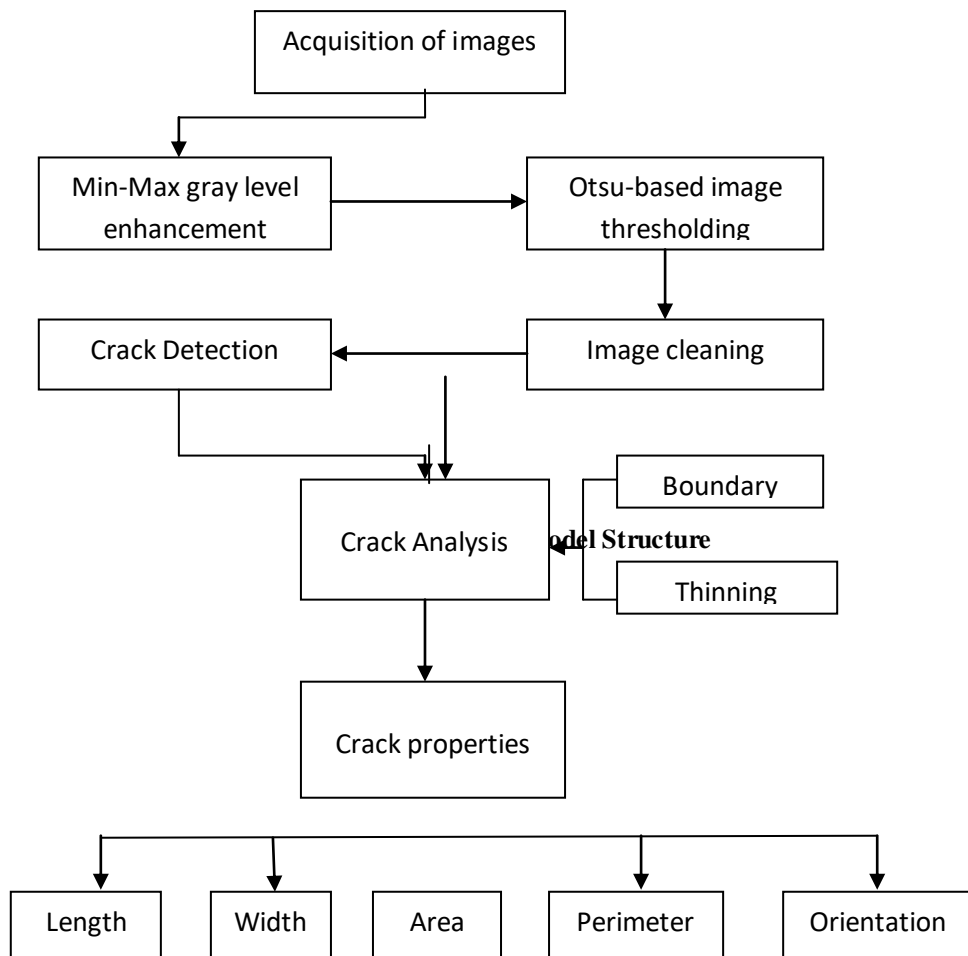

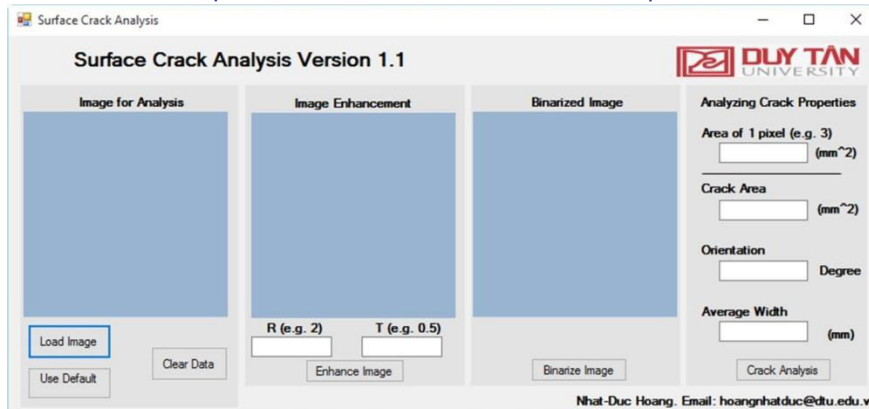

Third, the calculation of the crack width is separated into two cases: Case 1 is crack orientation  $\leq 45^\circ$  and Case 2 is crack orientation  $> 45^\circ$ . The Case 1 is for a crack object that resembles a horizontal crack and the Case 2 is for a crack object that tends towards a vertical crack. The equation for estimating the crack width at a section  $s$  of the crack object (denoted as  $W(s)$ ) in the two cases are provided as follows :

Case 1:  $W(s) = L_v(s) \cdot \sin(90 - \alpha)$

Case 2:  $W(s) = L_h(s) \cdot \sin(\alpha)$

where  $L_v(s)$  and  $L_h(s)$  denote the number of crack pixels measured in vertical and horizontal.

### III. APPLICATIONS

The proposed program for crack detection and analysis is verified with a set of testing images. The parameters of the program are empirically set as follows: The adjusting ratio:  $RA = 2$ . The margin parameter:  $\tau = 0.5$ . The crack detection results are reported from Fig. 3 to Fig. 5. In all testing images, the crack pixels revealed by the proposed method are apparently clear and well separated from the surface structure. In addition, the cracks found by the proposed program clearly resemble the actual crack objects in the digital images. Thus, it is able to conclude that the newly constructed program can be a useful tool for practical application of crack detection in building structure.

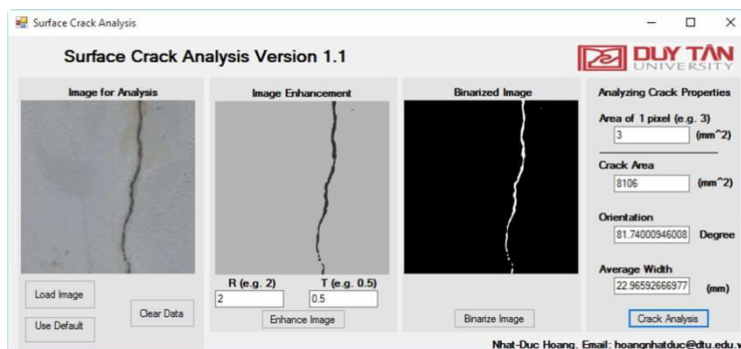


Fig. 3 Analysis result of the testing image number 1

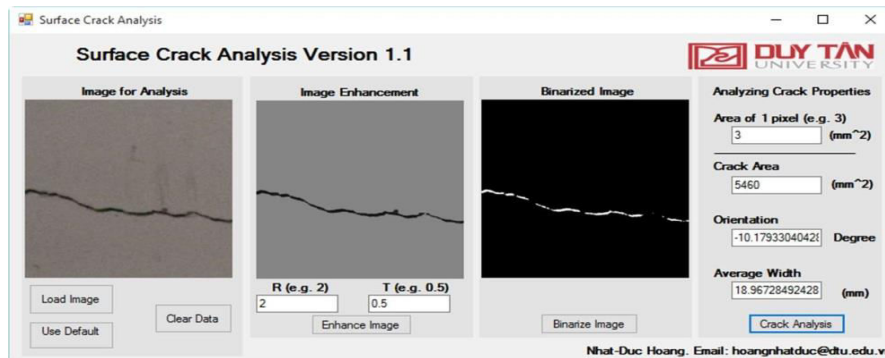


Fig. 4 Analysis result of the testing image number 2

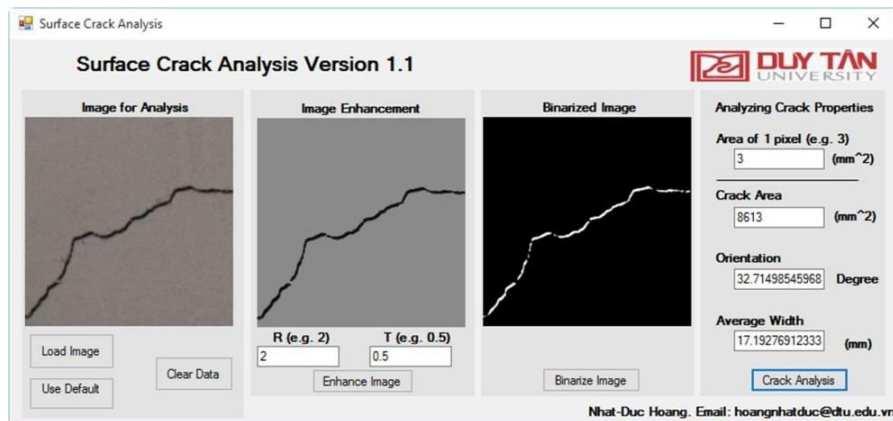


Fig. 5 Analysis result of the testing image number 3

#### IV. CONCLUSION

This study develops an image processing program, named as Surface Crack Analysis, for defects on surface of building structures. The program utilizes an image preprocessing step for enhancing the image quality. The well known Otsu method is used for image binarization to reveal cracks existing in building surface. The newly constructed program is capable of recognizing crack objects and analyzing their characteristics including the area, width, and orientation. The experimental results assert that the cracks in testing images have been identified satisfactorily. Hence, the program can be a potential alternative for building maintenance agency used in the task of building periodically survey.

#### REFERENCES

- [1] X. Wu, Y. Jiang, K. Masaya, T. Taniguchi, and T. Yamato, "Study on the correlation of vibration properties and crack index in the health assessment of tunnel lining," *Shock and Vibration*, vol. 2017, Article ID 5497457, 9 pages, 2017.
- [2] A. M. A. Talab, Z. Huang, F. Xi, and L. HaiMing, "Detection crack in image using Otsu method and multiple filtering in image processing techniques," *Optik-International Journal for Light and Electron Optics*, vol. 127, no. 3, pp. 1030–1033, 2016.
- [3] R. S. Adhikari, O. Moselhi, and A. Bagchi, "Image-based re-trieval of concrete crack properties for bridge inspection," *Automation in Construction*, vol. 39, pp. 180–194, 2014.
- [4] E. B. Anil, B. Akinci, J. H. Garrett, and O. Kurc, "Information requirements for earthquake damage assessment of structural walls," *Advanced Engineering Informatics*, vol. 30, no. 1, pp. 54–64, 2016.
- [5] M. M. Torok, M. Golparvar-Fard, and K. B. Kochersberger, "Image-based automated 3D crack detection for post-disaster building assessment," *Journal of Computing in Civil Engineering*, vol. 28, no. 5, p. A4014004, 2014.
- [6] D. Thatoi, P. Guru, P. K. Jena, S. Choudhury, and H. C. Das, "Comparison of CFBP, FFBP, and RBF networks in the field of crack detection," *Modelling and Simulation in Engineering*, vol. 2014, Article ID 292175, 13 pages, 2014.

- [7] C.Koch,K.Georgieva,V.Kasireddy,B.Akinci,andP.Fieguth,“A review on computer vision based defect detection and condition assessmentofconcreteandaspahltcivilinfrastructure,”*AdvancedEngineering Informatics*, vol. 29, no. 2, pp. 196–210,2015.
- [8] B. Y. Lee, Y. Y. Kim, S.-T. Yi, and J.-K. Kim, “Automated image processing technique for detecting and analysing concrete surface cracks,” *Structure and Infrastructure Engineering*,vol.9,no.6,pp.567–577,2013.
- [9] H.Kim,E.Ahn,S.Cho,M.Shin,andS.-H.Sim,“Comparative analysis of image binarization methods for crack identification in concrete structures,” *Cement and Concrete Research*, vol. 99, pp. 53–61,2017.
- [10] H. Zakeri, F. M. Nejad, and A. Fahimifar, “Image based techniques for crack detection, classification and quantification in asphalt pavement: a review,” *Archives of Computational Methods in Engineering*, vol. 24, no. 4, pp. 935–977, 2016.
- [11] A. Mohan and S. Poobal, “Crack detection using image processing: a critical review and analysis,” *Alexandria Engineering Journal*,2017.
- [12] M. Rabah, A. Elhattab, and A. Fayad, “Automatic concrete cracks detection and mapping of terrestrial laser scan data,” *NRIAG Journal of Astronomy and Geophysics*, vol. 2, no. 2,pp. 250–255,2013.
- [13] N. Chaki, S. H. Shaikh, and K. Saeed, “Applications of binarization,” in *Exploring Image BinarizationTechniques*,pp.65–70, Springer,NewDelhi,India,2014.
- [14] R.C.Gonzalez,R.E.Woods,andS.L.Eddins,*DigitalImage Processing Using MATLAB*, Pearson Prentice-Hall, Upper Saddle River, NJ, USA,2004.
- [15] N. Otsu, “A threshold selection method from gray-level histograms,” *IEEE Transactions on Systems, Man, and Cybernetic*,vol.9,no.1,pp.62–66,1979.
- [16] A.Rimkus,A.Podvieszko,andV.Gribniak,“Processingdigital images for crack localization in reinforced concrete members,” *Procedia Engineering*, vol. 122, pp. 239–243,2015.
- [17] S.Y.Alam,A.Loukili,F.Gronidin,andE.Rozière,“Useofthedigital image correlation and acoustic emission technique tostudy the effect of structural size on cracking of reinforced concrete,”*EngineeringFractureMechanics*,vol.143,pp.17–31,2015.
- [18] A. Ebrahimkhanlou, A. Farhidzadeh, and S. Salamone, “Multifractal analysis of crack patterns in reinforcedconcrete shear walls,” *Structural Health Monitoring*, vol. 15, no. 1,pp. 81–92,2016.
- [19] T.Yu,A.Zhu,andY.Chen,“Efficientcrackdetectionmethod for tunnel lining surface cracks based on infrared images,” *Journal of Computing in Civil Engineering*, vol. 31, no. 3,p. 04016067,2017.
- [20] Y. O. Ouma and M. Hahn, “Wavelet-morphology based detection of incipient linear cracks in asphalt pavements from RGB camera imagery and classification using circular Radon transform,”*AdvancedEngineeringInformatics*,vol.30,no.3,pp. 481–499,2016.

## BIOGRAPHY

**Shweta Dhanpal Shenmare** is PG student in Computer Science and Engineering Department, Tulsiramji Gaikwad Patil College of Engineering and Technology, Mohgaon, Nagpur. She received B.E degree in 2016 from KDKCE, NAGPUR, MS, India. Her research interests are Image Processing, Computer Networks (wireless Networks), , web 2.0 etc.



**INNO SPACE**  
SJIF Scientific Journal Impact Factor

Impact Factor:  
7.488

**ISSN** INTERNATIONAL  
STANDARD  
SERIAL  
NUMBER  
INDIA



# INTERNATIONAL JOURNAL OF INNOVATIVE RESEARCH

IN COMPUTER & COMMUNICATION ENGINEERING

 9940 572 462  6381 907 438  [ijircce@gmail.com](mailto:ijircce@gmail.com)



[www.ijircce.com](http://www.ijircce.com)

Scan to save the contact details