



International Journal of Innovative Research in Computer and Communication Engineering

(A High Impact Factor, Monthly, Peer Reviewed Journal)

Website: www.ijircce.com

Vol. 6, Issue 5, May 2018

An Efficient Way of Clearing the Garbage System Using Wireless Sensors

Keerthana M¹, Kokila S², Kanakambika RG³, M S Shoba⁴, Dr. Jittendranath Mungara⁵

HOD, Department of ISE, New Horizon College of Engineering ,Bangalore, Karnataka, India

Senior Assistant Professor, Department of ISE,, NHCE, Bangalore, India

B.E Students, Department of ISE, New Horizon College of Engineering, Bangalore, Karnataka, India

ABSTRACT:The increase in population, has led to dangerous degradation in the state of affairs of hygiene with respect to waste management system. The spillover of waste in public areas generates the polluted condition in the neighboring areas. It may lead to various severe diseases for the nearby residencies. For eliminating the garbage's and maintaining this, it requires 'smartness based garbage management system. IOT based smart garbage management system is used, which checks the waste level over the bins by using Sensor systems. Once it detects the waste immediately this system alerts the concerned authority through Bluetooth and GSM/GPRS system. Here Microcontroller is used as an interface between the sensor system and GSM/GPRS system. So to monitor and integrate an android application is used for the desired information which is related to the various level of waste in different locations. This is ensued the greenish in the environment and support for swachh bharaat for cleanness.

KEYWORDS: Microcontroller, ultrasonic sensor, Bio sensor, GSM, Bluetooth.

I. INTRODUCTION

Garbage Monitoring System: - Garbage may consists of the unwanted material left over from City, Public area, Society, College, home etc, due to these wastes there will be poisonous gases emitting from them which is harmful for the nearby residents which leads to severe diseases. This survey is related to the "Smart garbage monitoring system using internet of things". So for smart lifestyle, cleanliness is required. This helps us to eradicate the garbage disposal problem using Internet of Things (IOT) in which this is done using microcontrollers, transceivers for digital communication that will be able to communicate with one another [1].

One of the approach is by using ultrasonic sensors which is used to detect the level of the waste in the bin and another is by using biosensors which detects the hazardous gases. The cities will become cleaner and the smells of the garbage will be much less and will keep our environment green and can support swachh bharaat [3].

II. RELATED WORK

In city areas, the clearance of waste management is one of the challenging tasks throughout the world. There is a need of well organization in monitoring garbage system. Although there are many organizations, still we are facing waste management system problem. Since lack of coordination among authorities and people. Therefore smart garbage monitoring system and clearance system using internet of things paper focuses on clearing the waste efficiently by using wireless sensors system and GSM/GPRS.

The ultrasonic sensor detects the level of the wastes in the dustbin. Force sensor is used to estimate wastes of the dustbin. Microcontroller acts an interface between the sensors system and the GSM/GPRS system. LED lights are used to indicate if the bin is full or empty. An android application is used through which the information is received by the concerned authority or truck driver.

The hardware components such wireless sensors like ultrasonic and force and LED lights and microcontroller must be properly connected and ensure that the SIM card is placed correctly in the GSM module. And make sure that the android handset is connected to the internet [1].

International Journal of Innovative Research in Computer and Communication Engineering

(A High Impact Factor, Monthly, Peer Reviewed Journal)

Website: www.ijircce.com

Vol. 6, Issue 5, May 2018

As dustbin is considered as a basic need to maintain the level of cleanliness in the city, it is very important to clean all the dustbins as soon as they get filled up. We will use ultrasonic sensors for this system. The sensor will be placed on top of bin that helps in sending the information to the concerned truck driver that the level of garbage has reached its maximum level. Once the information is received, the bin should be emptied soon as possible. With this system, the minimal number of smart bins can be placed around the whole city and the city will still be much better. RFID is a modern and fast growing mobile technology that differently and exactly identifies a RFID tag embedded in waste bin. The disadvantages of the existing system is that the employees have to go and check the bins daily if they are filled or not, this will results in high cost. If the bin doesn't get emptied on specified time then the environment becomes unhygienic and illness could be caused and spread. The proposed system will help in removing all these disadvantages.

Once driver clears the waste the PDA is transfers all the data to the SQL. The back-end server is used to store and process the waste data which is transferred through WiFi (wireless fidelity) connection and the internet. Wifi is designed for the wireless Ethernet 802.11b standard for WLANs (wireless local area network) enhances bandwidth, making suitable for "local hot spot" service.

The present information can be gained regarding the level of the dustbin filled. It will also help in reducing the cost as the truck drivers will have to go only at that time when the bin is full. This will also help in resource optimization and once the bins are emptied at time the environment will remain safe from all kinds of diseases. The cities will become cleaner and the smells of the garbage will be much less and will keep our environment green and can support Swachh Bharat [2].

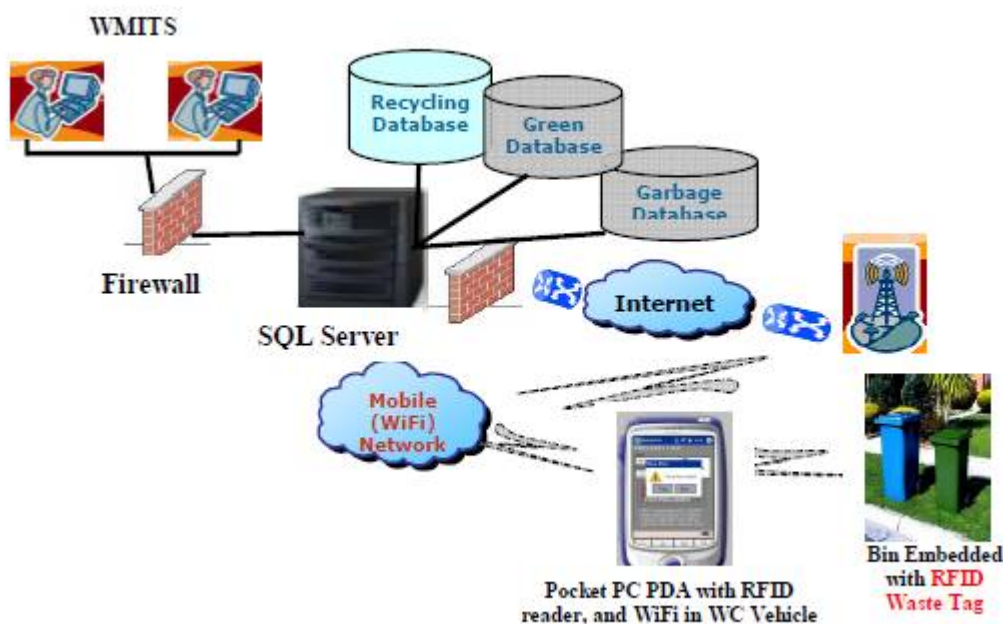


Fig.1: Components of RFID system and sensor based waste management system

Internet of things is constantly giving different solution to the problems faced by man in current day. Solid waste management is an integral part of smart city. The process of tracking, collecting, and managing could be monitored by providing complete IOT based system. One of the approaches to provide solution to improve the reliability and



International Journal of Innovative Research in Computer and Communication Engineering

(A High Impact Factor, Monthly, Peer Reviewed Journal)

Website: www.ijircce.com

Vol. 6, Issue 5, May 2018

efficiency of the system is LoRa technology. LoRa technology is used for long data communication, when compared to wifi or Bluetooth.

Here the sensors are used to collect the data from the dustbin and is sent to the gateway through LoRa technology The data from gateway is collected and is stored in the cloud over the Internet using the MQTT(message queue telemeter transport).

Solid waste management can be divided into segregation, collection and transportation. The working of proposed system architecture addresses segregation of solid waste that can be done at the initial level.

Citizen can segregate the waste according to wet waste (biodegradable) and dry waste (plastic, glass, papers) and dump the garbage in the dustbin placed at different location respectively. Here the IR sensors are used to detect the level of the waste collected. And a gas sensor is used to detect the hazardous gases. LED lights are used for notifications. The sensors and actuator are embedded on microcontroller that collects the sensor data and sends it to the gateway through LoRa transceiver module. The gateway collects the various sensor data from garbage bin placed at different location. Here data is locally processed and these data is sent to cloud over TCP/IP using MQTT protocol.

MQTT protocol collects the data and NoSQL database stores those data. Rule engines are used for analytics and display the collected data on dashboard. By Google maps and suitable algorithm the trucks can be alerted to collect waste in required location. Report is generated using data analytics and admin panel the concerned authority can be monitor the entire process [3].

One of the main problem faced in today's world is waste management system, due to underlying and overflow of wastes from the dustbin result bad smell and harmful gases causes various diseases which in turn affects our green environment. To overcome the above issue a smart intelligent garbage alert system for garbage was developed. RFID (radio frequency identification) is a technique that is used for verifying and identifying the process which helps the garbage alert system by providing automatic identification of filled garbage in the bin and sends message to clear the garbage. E-monitoring performs remote monitoring to clear the wastes; therefore it reduces the manual work. An android app receives notifications through wifi/GSM.

- E-monitoring system

In traditional approach, whenever the garbage bin is filled the wastes are cleared but they are not periodically removed. Where as in convention method, there is use of RFID technology which will overcome the above mentioned issue.

- E-monitoring system consists of two parts:

1. Embedded system
2. Web based software system interface

1. Embedded system

It comprises of RFID reader, microcontroller, liquid crystal central (LCD) and GPRS/GPSM.

2. Web based software system

It consists of GPSM, a central server, database server and web server. The aim of this system is to develop a better monitoring system for proper municipal solid waste.

- Smart dustbin

If the wastes are not disposed properly it leads to air and soil pollution. The harmful gases and the bad smell will adversely affect human beings. To overcome this smart dustbin was designed. The objective is to overcome improper waste management.

- Design of dustbin

The smart dustbin consists of piston, compression plate, lid of opening and leaf switch. The piston moves back and forth in vertical direction. Compression plate is used to compress the waste. Dustbin opening is closed by lid. Leaf switch could be placed upside down using hole on the plate.

International Journal of Innovative Research in Computer and Communication Engineering

(A High Impact Factor, Monthly, Peer Reviewed Journal)

Website: www.ijirccce.com

Vol. 6, Issue 5, May 2018

- Arduino UNO

It is a microcontroller board consisting of 14 digital I/O by connecting battery task can be achieved.

- Ultrasonic sensor HC-SR04

It offers a 2cm – 400cm non-contact measurement function. It converts electrical energy into sound to send pulse.

In RFID technology the combination of antenna and microphone are attached on RFID tag. It is a small device that stores and sends the data to RFID reader. It receives electrical energy after getting transformed from radio frequency.

- System implementation

The system is designed to avoid the overflowing of wastes from dustbin by transmitting the alerts to microcontroller. It uses RFID technology to identify and verify process. The function of each parts of the system is enunciated earlier.

The block diagram is shown below

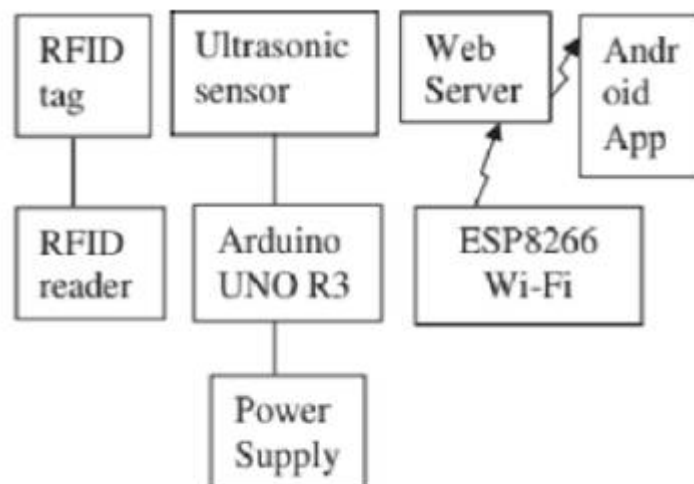


Fig.2: Block diagram of garbage alert system

The alert system is used for maintenance in the garbage system. When this is deployed a green environment and pollution free can be achieved. It also decreases the manual work in municipality and pollution monitoring system [5].

For a healthy environment we need to monitor and clear the garbage waste regularly to stay healthy. In the old system where people are hired to check and empty the filled bins has led to human error and neglect. In today's life people scarcely have time to stop and record things manually, even though critical things like cleanliness gets ignored.

And also we have put forward the concept of network of smart garbage bin which is based on Stack Based front End approach with the cloud computing and know how Machine Learning techniques like Decision Forest Regression can be applied to the sensor data layered by the system to gain useful data/information to improve the efficiency of the garbage monitoring so as to save fuel and time and make the whole process in an efficient and convenient. The workers who go on a routine/regular check should know the shortest route [6].

III. PROPOSED SYSTEM

Garbage is a waste generated due to the various activities, such as industry waste, wet waste like vegetable waste, dry waste, commercial waste, house hold wastes etc. Improper utilization of the garbage may pose several environment issues namely generation of various hazardous gases which leads to the various health issues. While carrying the garbage, it must be carried and disposed by following various types of protocols.

International Journal of Innovative Research in Computer and Communication Engineering

(A High Impact Factor, Monthly, Peer Reviewed Journal)

Website: www.ijirccce.com

Vol. 6, Issue 5, May 2018

The processing of garbage involves the carrying the garbage from one place to other through trucks and cranes. But while carrying the gases, the people who are responsible to collect the waste must follow some of the rules and regulations. So that it should not affect the people of the society and our green environment.

But at the time of processing in the cities is important. Because, in current days the garbage collection is not been collected properly due to lack of coordination among authorities, specialized vehicles and other means. So, the garbage which is on the road or land is degrading itself and emits a bad smell and also poisonous gases. Because in the garbage collectors, it's not cleaned properly and causes the different diseases like cholera, skin diseases etc. The proper utilization of garbage can help us to get some gases. Some may harm and some are useful. The useful gases which are emitting from the garbage can be utilized for commercial purpose also.

In the proposed system, initially the green LED is on which indicates the bin is empty. The level of the waste in dustbin is detected with the help of ultrasonic sensor. When the measured values of sensors exceeds a certain threshold value the Red LED glows. And the message is sent to an android app through Bluetooth module specifying "Bin Full."

And yellow LED glows if there is any harmful gas or foul smell that is detected from biosensor and a message "gas is detected" is sent. Once the notification is received by the concerned person, he alerts the authorized person to clear the waste.

The gases which are emitting from the garbage can cause various diseases and harm the environment. So to know what is the concentration of the garbage in various places and in the main container, this is designed and implemented in various places and tested. Earlier, people of the society and the concerned authorities used to know that some sort of gases are emitting from the garbage. But they don't know the exact values which are emitting from the garbage. Also they are not getting any data. The people of the society must inform for the concerned officials back to back once the garbage is collected.

To address the problem here about detection of various hazardous gases which are emitting from garbage causes diseases like asthma, cholera, typhoid, malaria etc. The gases which are emitting from the garbage should be monitored. Hardware or any other means must be installed in the place of garbage. The sensors are going to deploy in the garbage. The sensors must be low cost, less power consumption sensors. With those sensors, sense the gases which are emitting from the garbage and send the same information and it must be stored in the public cloud. Also information must be displayed in the web side accordingly. An SMS has to be sent to the authorized person.

IV. RESULTS

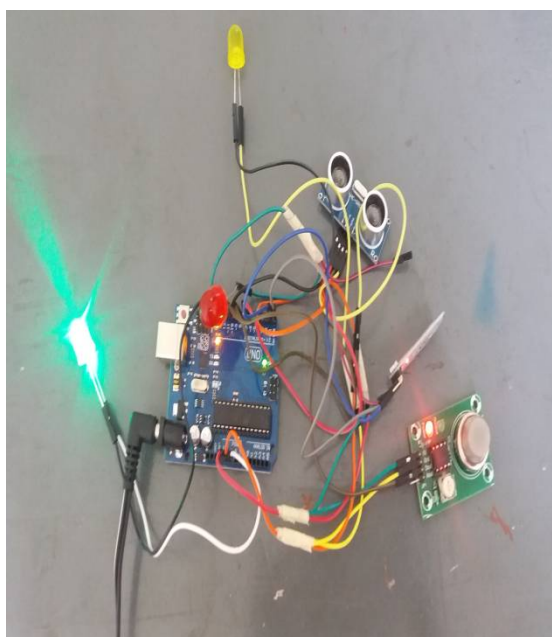


Fig.3: Indication of an empty dustbin.

International Journal of Innovative Research in Computer and Communication Engineering

(A High Impact Factor, Monthly, Peer Reviewed Journal)

Website: www.ijircce.com

Vol. 6, Issue 5, May 2018

The above image indicates that when the bin is empty the Green LED glows until any waste is thrown inside and so the person can throw the waste in the dustbin.

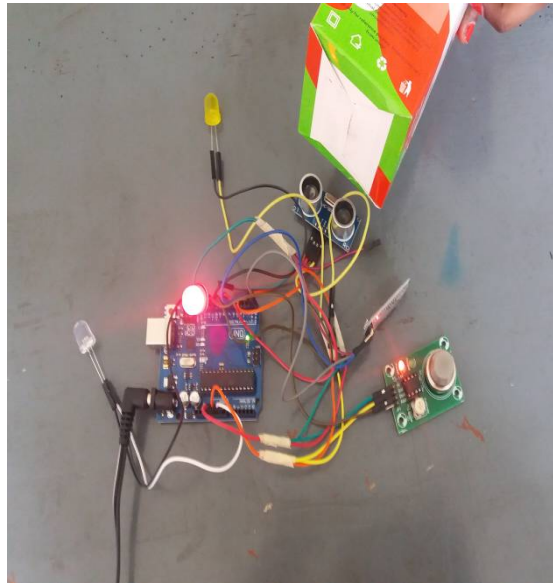


Fig.4: Indication of when the dustbin is full.

The above image indicates that when waste is thrown in the bin the Red LED glows and it also indicates if the bin is half filled or completely filled, so that the concerned person can come and collect the wastes.

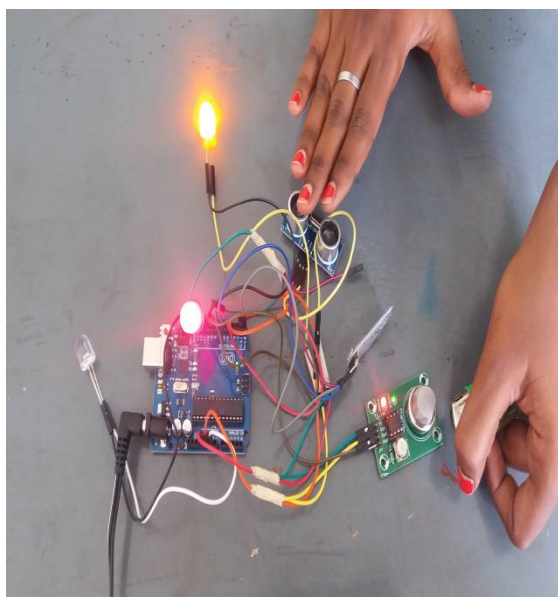


Fig.5: Indication of dustbin full and detection of harmful gases.

International Journal of Innovative Research in Computer and Communication Engineering

(A High Impact Factor, Monthly, Peer Reviewed Journal)

Website: www.ijircce.com

Vol. 6, Issue 5, May 2018

The above image indicates Yellow LED which glows when the waste in the bin starts emitting any harmfulgases and the red LED glows when the dustbin is full.

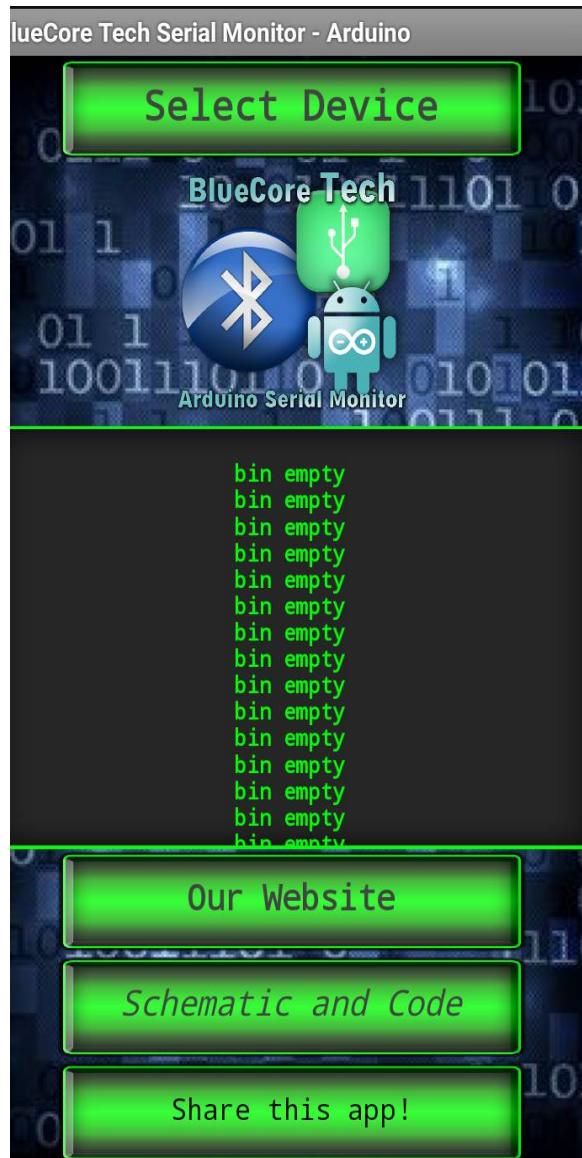


Fig.6: Showing the status of the bin which is "bin empty" in an android app using bluetoothmodule.

A mobile based app named bluecore tech serial monitor is used to send messages of the monitored bin levels. The bin waste level is measured every one second to get accurate information. A message "bin empty" will be shown in the android app using Bluetooth

International Journal of Innovative Research in Computer and Communication Engineering

(A High Impact Factor, Monthly, Peer Reviewed Journal)

Website: www.ijircce.com

Vol. 6, Issue 5, May 2018

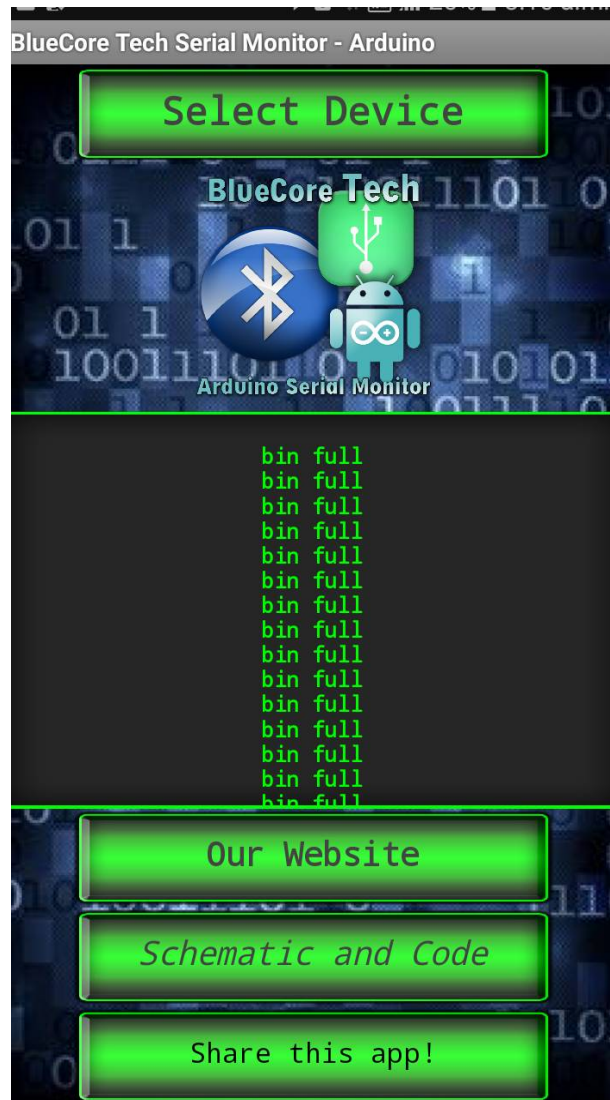


Fig.7:Showing the status of the bin which his"binfull"inanandroidappusingbluetoothmodule.

Once the bin is filled or half filled a notification "Bin full" is sent to the mobile app and to the user. Once the bin is full it can be cleared. Once the bin is cleared it goes back to indicating green at the bin and the message "Bin empty" is displayed.

International Journal of Innovative Research in Computer and Communication Engineering

(A High Impact Factor, Monthly, Peer Reviewed Journal)

Website: www.ijirccce.com

Vol. 6, Issue 5, May 2018

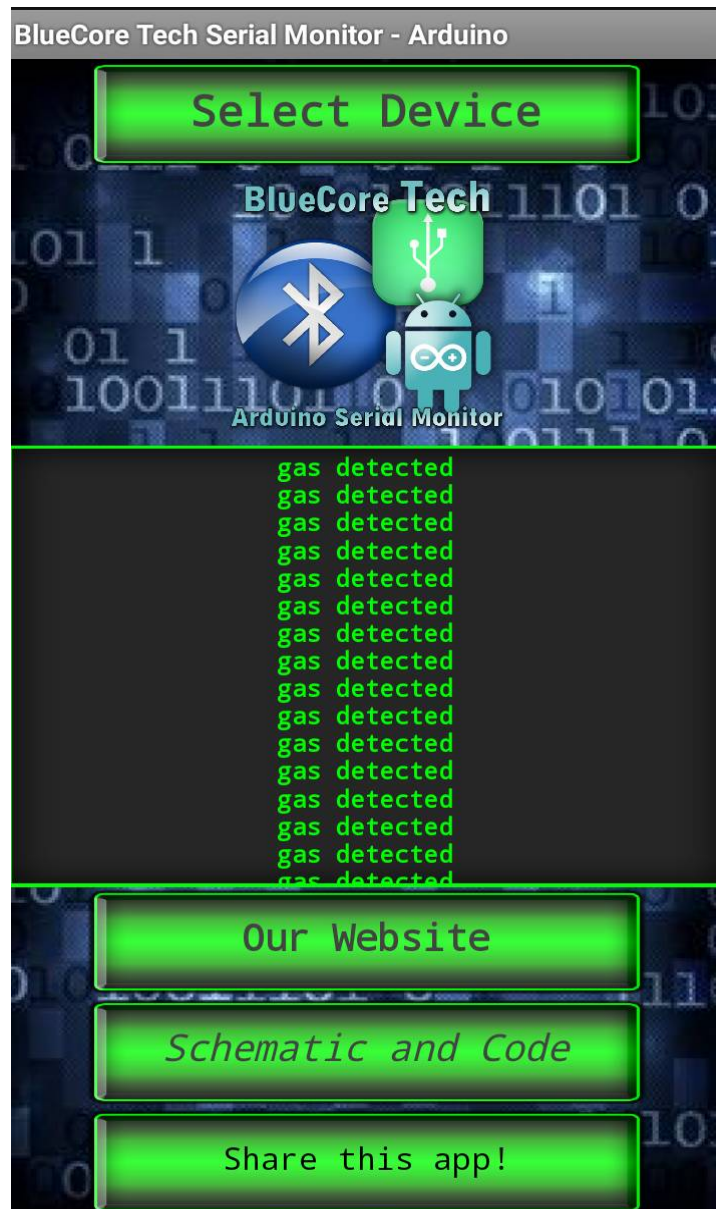


Fig.8:Showing the status of the bin which is "gas detected" in an android app using bluetooth module.

Once the bin is half filled or completely filled and if the biosensor detects any poisonous gas the yellow led glows and a notification "Gas detected" is sent to the app and the user. This allows us to immediately clear the waste and avoid damage to the environment.



International Journal of Innovative Research in Computer and Communication Engineering

(A High Impact Factor, Monthly, Peer Reviewed Journal)

Website: www.ijircce.com

Vol. 6, Issue 5, May 2018

VII.CONCLUSION

In the entire world, waste management is a major challenging one. If it is not properly disposed or cleaned, it will cause severe diseases and spoil the green environment. There is need of new mechanism to properly dispose the waste [5]. Here a working prototype of the proposed system was successfully created and implemented using technologies. An embedded alert system is used for the proper monitoring and maintenance of the garbage bin. This system alerts for regular clearance of garbage dumped. Thus this system can provide solution for disease free country and green environment. In this paper we have described multi-layer waste management system architecture for design of a RFID; sensor based real-time automatic WIWSBIS. We have shown the application and implementation of smart garbage monitoring system. Using WIWSBIS, waste management service providers (e.g., municipalities, waste collectors) have a chance to track a waste identity (i.e., customer), weight, missing/stolen bins quickly and accurately without human intervention. This system also helps service providers to automate customer invoices, enhance cost savings and improve security [3].

REFERENCES

1. S. Vinoth Kumar, T.Senthil Kumaran A. Krishna Kumar, Mahantesh Mathapati 2017 IEEE International Conference on Smart Technologies and Management for Computing, Communication, Controls, Energy and Materials (ICSTM).
2. U.S. Government Accountability Office, "Radio Frequency Identification Technology in the Federal Government", 441 G Street NW, Room LM Washington, D.C. 20548, 2005.
3. Australian Greenhouse Office (AGO) 2004, Government Response to Tambling MRET Review Recommendations, Commonwealth of Australia, Canberra.
4. Lee, Sangshin, "Mutual Authentication of RFID System using Synchronized Information", M. Sc. Thesis, School of Engineering, Information and Communications University, South Korea, 2005.
5. Gao, Bo Cheng, Chi Ho Yuen, Matthew M.F. Murch, and Ross D, Low Cost Passive UHF RFID Packaging with Electromagnetic Band Gap (EBG) Substrate for Metal Objects, Electronic Components and Technology Conference, 2007. ECTC '07. IEEE Conference Proceedings, ISSN: 0569-5503, ISBN:1-4244-0985-3.
6. Calibration Systems, New Compact Digitized Load Cell, STRAINSENSE ENTERPRISES, INC. 1080 Long Run Road McKeesport, PA 15132, accessed on 09 October 2007.
7. S. Shepard, "RFID Radio Frequency Identification", *The McGraw-Hall Companies, Inc. USA*, 2005.
8. Claire Swedberg (2007), NEC Works on RFID Tags, Readers for Bottle Caps, RFID Journal, accessed on 10 October 2007. 180
9. Belal Chowdhury, Morshed U Chowdhury "RFID-based Real-time Smart Waste Management System", in 2007 Australasian Telecommunication Networks and Applications Conference December 2nd – 5th 2007, Christchurch, New Zealand.
10. Abhay Shankar Bharadwaj, Rainer Rego, Anirban Chowdhury, "IoT Based Solid Waste Management System" in Frugal Labs Tech Solutions Private Limited, Bengaluru, Karnataka, India 2016.
11. Dr. N. Sathish Kumar, B. Vijaylakshmi, R. Jenifer Prathana, A. Shankar, "IOT Based Smart Garbage alert system using Arduino UNO" IEEE 2016.
12. Jetendra Joshi, Joshitha Reddy, Praneeth Reddy, Akshay Agarwal, Rahul Agarwal, Amrit Bagga, and Abhinandan Bhargava, "Cloud Computing Based Smart Garbage Monitoring System" in 2016 3rd International Conference on Electronic Design (ICED), August 11-12, 2016, Phuket, Thailand.
13. "Solid Waste Management in Bruhat Bangalore Mahanagara Palike (BBMP)" 2009. [Online]. [Accessed: Aug. 1, 2016]. Available:
14. S. Thakker and R. Narayana moorthi, "Smart and wireless waste management," International Conference on Innovations in Information, Embedded and Communication Systems (ICIIECS), 2015, Coimbatore, 2015, pp. 1-4. doi: 10.1109/ICIIECS.2015.7193141
15. M. H. A. Wahab, et.al. "Smart Recycle Bin: A Conceptual Approach of Smart Waste Management with Integrated Web Based System," International Conference on IT Convergence and Security (ICITCS), 2014, Beijing, 2014, pp. 1-4. doi: 10.1109/ICITCS.2014.7021812
16. C. K. M. Lee and T. Wu, "Design and development waste management system in Hong Kong," 2014 IEEE International Conference on Industrial Engineering and Engineering Management, Bandar Sunway, 2014, pp. 798-802. doi: 10.1109/IEEM.2014.7058748
17. "LoRa Alliance™ Technology" 2016. [Online]. Available: <https://www.lora-alliance.org/What-Is-LoRa/Technology> [Accessed: Aug. 1, 2016].
18. "SX1276/77/78/79-137MHz to 1020 MHz Low Power Long Range Transceiver"[Accessed:Aug. 1,[2016]
19. "Tata Communications debuts ultra-low power connectivity solution to pave the way for the Internet of Things in India" 2015. [Online]. Available: [debut-ultra-low-power-connectivity-solution-pave-way-internet-things](#) [Accessed: Aug. 1, 2016].