



International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Website: www.ijircce.com

Vol. 5, Issue 1, January 2017

Historical Document Preservation Using ICM and Filters

S.Ashika Parvin¹, S.Shajun Nisha²

M. Phil.,(P.G Scholar), Sadakathullah Appa Collge,Tirunelveli, India¹

Prof &Head, Department of PG Computer Science, Sadakathullah Appa Collge, Tirunelveli, India²

ABSTRACT: Digital image enhancement technique is used for improving the feature and quality of the images. In this paper, contaminated Brahmi script is taken as an input and it is being enhanced. There is a problem of preserving historical documents from degradation due to some bad storage conditions and poor contrast due to humidity. In this work, it is proposed to investigate the efficiency of logarithmic technique to enhance along with the performance of utilizing the Intersecting Cortical Model (ICM) network which is a simplified model of Pulse-Coupled Neural Network (PCNN) model and filters.

KEY WORDS: Digital Image Enhancement, PCNN, Filters , Brahmi script

I.INTRODUCTION

Image processing is a common term that covers image segmentation, image registration, image fusion, image thinning, image enhancement, edge detection, feature extraction, image recognition, noise removal from image, classification of images, texture and fabric defects identification, and surveillance. Image Enhancement is the improvement of digital image quality, without knowledge about the source of degradation. Enhancement may be used to restore an image that has suffered some kind of deterioration due to the optics, electronics and environment.

The manuscripts are the hand written documents and the techniques of writing manuscripts are called as "Paleography". These scripts get damaged or erased due to the calamities of time and nature, the poor quality of paper, dirt, humidity or usage of poor quality inks. To enhance certain features of an image Logarithmic transformation method is used. It is used to brighten the intensities of an image More often, it is used to increase the contrast of lower intensity values. Pulse coupled neural network (PCNN) can remove contamination of scripts when used along with the application of filters. Pulse coupled neural network (PCNN) is a single-layer, two-dimensional algorithm is laterally connected network of integrate-and-fire neurons between the image pixels and network neurons. It is a good pre-processor in which neurons produces temporal series of pulse outputs and has the following advantages like global optimal approximation characteristic and favorable classification capability, rapid convergence of learning procedure, an optimal network to accomplish the mapping function in the feed-forward, no need to pre-train. The Intersecting Cortical Model (ICM), or ICM algorithm presented is a reduced set of equations of the Pulse-Coupled Neural Network (PCNN) model. Filtering is a technique for modifying or enhancing an image to emphasize certain features or remove other features which includes smoothing, sharpening, and edge enhancement.

II.RELATED WORK

Digital image processing is a broad subject and often involves procedures which can be mathematically complex, but central idea behind digital image processing is quite simple[1]. Generally image enhancement techniques are used to get detail that is obscured, or to highlight certain features of interest in image. In image enhancement process one or more attributes of image are modified. In spatial domain techniques [2], we directly deal with the image pixels. The pixel values are manipulated to achieve desired enhancement. These enhancement operations are performed in order to modify the image brightness, contrast or the distribution of the grey levels.. One such method of transformation used in this paper is log transformation maps [3] a narrow range of low input grey level values into a



International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Website: www.ijirce.com

Vol. 5, Issue 1, January 2017

wider range of output values. Log functions are particularly useful when the input grey level values may have an extremely large range of values. This technique was used by [4]. By using this log transformation darker pixel values of the image are expanded by compressing the values in the higher levels. Compression of dynamic range values in an image by giving large variation in the pixel value is considered as the main characteristics of log transformation.

Image enhancement using log transformation can only improve the quality of an image. But for betterment we combine it with pulse-coupled neural network (PCNN) model is used along with filters. In the late 1980s, Eckhorn et al. discovered that the midbrain in an oscillating way created binary images that could extract different features from the visual impression when they had studied the cat visual cortex [6-8]. Based on these binary images the actual image is created in the cat brain. Due to this discovery they developed a neural network, called Eckhorn's model, to simulate this behavior. In the early 1990s, Rybak et al. also found the similar neural behavior based on the study of the visual cortex of the guinea pig and developed a neural network, called Rybak's model [9,10]. Because Eckhorn's model and Rybak's model provided a simple, effective way for studying synchronous pulse dynamics in networks, they were recognized as being very potential in image processing [11-13]. The functioning of the visual cortex has to be studied in order to develop algorithms. This is more complicated than programming of computers. Researchers started working in the beginning of 1950s [13]. Pulse coupled neural networks are unsupervised networks, in which the network is provided with inputs but not the desired outputs. The network is self organized.

III. MOTIVATION AND JUSTIFICATION

Linear Transformation has an important characteristic that it preserves relative spacings. Values that are evenly spaced before transformation remain evenly spaced after transformation. So better enhancement cannot be achieved using this. To overcome this problem log transformation is used to an image which will expand its low valued pixels to a higher level and has little effect on higher valued pixels so in other words it enhances image in such a way that it highlights minor details of an image. When used log transformation along with pulse-coupled neural network (PCNN) intersecting cortical model (ICM) it works better because ICM algorithm, is a reduced set of equations of the Pulse-Coupled Neural Network (PCNN) model where there are no linking neurons. This is especially designed for enhancing features without sharp edges or straight lines in images. It is faster than the pulse-coupled neural network (PCNN) and hence it may be preferable to be used in many cases.

Motivated by all these facts, we are inspired to increase the quality of an image using log transformation and ICM algorithm. Hence I justify that the association of enhancement techniques with Intersecting Cortical Model (ICM), a self-organized network and filtering technique is suitable for this application.

IV. ORGANISATION OF THE PAPER

The Remaining Paper is organized as follows: Section V includes Methodology which includes outline of the proposed work, Section VI includes Experimental Results, Section VII includes Performance Evaluation, Section VIII includes conclusion of the paper.

V. METHODOLOGY

In this paper, a contaminated brahmi script is taken as an input for which enhancement technique is used for getting rid of some deteriorations that are present in the image. Logarithmic transformation is one of the enhancement technique that is used to brighten the image. It is a pre-processing step in this work. The process then continues with applying PCNN algorithm to overcome contamination in an image. Once they have been removed they can be enhanced more using filters. The main advantage of filters is re-evaluating the value of every pixel in an image to reduce noise by smoothing, and/or enhance edges. Filters provide an aid to visual interpretation of images. The image that is reconstructed is free from noise.

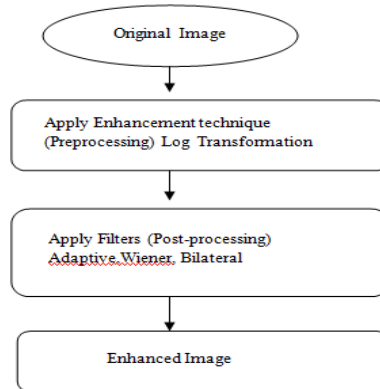


International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Website: www.ijirce.com

Vol. 5, Issue 1, January 2017



1. Logarithmic Transformation

Image transformation can be done by logarithmic transformation to make highly skewed distributions less skewed. This can be valuable both for making patterns in the data more interpretable and for helping to meet the assumptions of inferential statistics. Log transformation in general is shown by this equation:

$$s=c \log(1+r)$$

where s and r are the pixel values of the output and the input image and c is a constant. It can have intensity range from 0 to 10^6 or higher.

2. Pulse-Coupled Neural Networks (PCNN)

Over the past decade, PCNNs have been used in a variety of image processing applications, including image segmentation feature generation, face extraction, motion detection, region growing, and noise reduction. A PCNN is a two-dimensional neural network. Each neuron in the network corresponds to one pixel in an input image, receiving its corresponding pixel's color information (e.g. intensity) as an external stimulus. Each neuron also connects with its neighboring neurons, receiving local stimuli from them. Through iterative computation, PCNN neurons produce temporal series of pulse outputs. The standard PCNN model is described as iteration by the following equations :

$$F_{ij}[n] = e^{-\alpha F} F_{ij}[n-1] + V_f \sum_{k,l} w_{ij,kl} Y_{kl}[n-1] + S_{ij}$$

$$L_{ij}[n] = e^{-\alpha L} L_{ij}[n-1] + V_l \sum_{k,l} m_{ij,kl} Y_{kl}[n-1]$$

$$U_{ij}[n] = F_{ij}[n](1 + \beta L_{ij}[n])$$

$$Y_{ij}[n] = \begin{cases} 1 & U_{ij}[n] > T_{ij}[n] \\ 0 & \text{otherwise} \end{cases}$$

$$T_{ij}[n] = e^{-\alpha T} T_{ij}[n-1] + V_T Y_{ij}[n]$$

In these equations, $S[i,j]$ is the input stimulus such as the normalized gray level of image pixels in $[i,j]$ position, $F_{ij}[n]$ is the feedback input of the neuron in (i,j) and $L_{ij}[n]$ is the linking item. $U_{ij}[n]$ is the internal activity of neuron, and $T_{ij}[n]$ is the dynamic threshold. $Y_{ij}[n]$ stands for the pulse output of neuron and it gets either the binary value 0 or 1.

3. The Intersecting Cortical Model (ICM)

The ICM algorithm is especially designed for enhancing features without sharp edges or straight lines in images. The theoretical foundation of ICM is given and it is shown how the ICM can be derived as a reduced set of equations of the Pulse-Coupled Neural Network (PCNN) model based upon models proposed by Eckhorn and Reitboeck.



International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Website: www.ijirce.com

Vol. 5, Issue 1, January 2017

$$F_{ij}[n] = fF_{ij}[n-1] + S_{ij} + W_{ij}\{Y[n-1]\}$$
$$Y_{ij}[n] = \begin{cases} 1, & F_{ij}[n] > \Theta_{ij}[n-1] \\ 0 & \text{otherwise} \end{cases}$$
$$\Theta_{ij}[n] = g\Theta_{ij}[n-1] + hY_{ij}[n]$$

In these equations, $S[i,j]$ is the stimulus (the input image, scaled so that the largest pixel value is 1.0). $H_{i,j}$ is defined by the threshold of the neuron and Y is the output image. f , g , and h are scalars. The ICM has higher speed because of reducing the number of equations over the PCNN. This model usually is applied in image segmentation, feature extraction, etc.

A. TYPES OF FILTERS

Filters are used to remove noise from an image. The following are the filters that are used.

1. Adaptive Median Filter

The adaptive median filtering has been applied widely as an advanced method. The Adaptive median Filter performs spatial processing to determine which pixels in an image have been affected by impulse noise. It classifies pixels as noise by comparing each pixel in the image to its surrounding neighbor pixels. Its main purpose is to remove impulse noise, smoothing other noise, reduce distortion, like excessive thinning or thickening of object boundaries. Its algorithm is given below:

Level A: $A1 = Z_{med} - Z_{min}$
 $A2 = Z_{med} - Z_{max}$
if $A1 > 0$ AND $A2 < 0$, go to level B
else increase the window size
if window size $< S_{max}$, repeat
level A
else output Z_{xy}
Level B: $B1 = Z_{xy} - Z_{min}$
 $B2 = Z_{xy} - Z_{max}$
if $B1 > 0$ AND $B2 < 0$, output
 Z_{xy}
else output Z_{med}

where Z_{min} is minimum gray level value in S_{xy} , Z_{max} is maximum gray level value in S_{xy} , Z_{med} is median of gray levels in S_{xy} , Z_{xy} is gray level at coordinates (x, y) and S_{max} is maximum allowed size of S_{xy} . The advantage of using adaptive filter is it preserves details of an image and smooths non-impulsive noise.

2. Wiener Filter

The Wiener filtering executes an optimal trade-off between inverse filtering and noise smoothing. It removes the additive noise and inverts the blurring simultaneously. The Wiener filtering is optimal in terms of the mean square error. The orthogonality principle implies that the Wiener filter in Fourier domain can be expressed as follows:

$$w(f_1, f_2) = \frac{H^*(f_1, f_2) S_{xx}(f_1, f_2)}{|H(f_1, f_2)|^2 S_{xx}(f_1, f_2) + S_{\eta\eta}(f_1, f_2)}$$

Where $S_{xx}(f_1, f_2)$, $S_{\eta\eta}(f_1, f_2)$ are respectively power spectra of the original image and the additive noise, and is the blurring filter. The major advantage of using this filter is that it controls output error and straightforward to design.

3. Bilateral Filtering

The bilateral filter is a non-linear technique that can blur an image while respecting strong edges. Its ability to decompose an image into different scales without causing haloes after modification has made it ubiquitous in

International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Website: www.ijirce.com

Vol. 5, Issue 1, January 2017

computational photography applications such as tone mapping, style transfer, relighting, and denoising. Its formulation is simple, each pixel is replaced by a weighted average of its neighbors. The bilateral filter is defined as

$$I^{\text{filtered}}(x) = \frac{1}{W_p} \sum_{x_i \in \Omega} I(x_i) f_r(\|I(x_i) - I(x)\|) g_s(\|x_i - x\|),$$

where I^{filtered} is the filtered image, I is the original input image to be filtered, x are the coordinates of the current pixel to be filtered, Ω is the window centered in x , f_r is the range kernel for smoothing differences in intensities, g_s is the spatial kernel for smoothing differences in coordinates. The main advantage of bilateral filter is that its *averaging is good* to remove random noise

VI. EXPERIMENTAL RESULT

Experiments were conducted to improve the quality of a contaminated brahmi script taken as an input. Log transformation with varying log values is applied to the script to highlight the minor details of an image is shown in Table 1. To the high contrast value of log applied to an image, Pulse Coupled Neural Network (PCNN) Intersecting Cortical Model (ICM) and different filtering techniques such as Adaptive Median Filter, Weiner Filter and Bilateral Filter are applied is shown in Table 2

TABLE 1: Images with varying log values
















Images	Values				
	S=1	S=3	S=7	S=9	S=11
<i>Image 1</i>					
<i>Image 2</i>					
<i>Image 3</i>					













Table 2: To the log value s=11 ICM and Filters are applied

International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Website: www.ijircce.com

Vol. 5, Issue 1, January 2017

Images	ICM	Adaptive	Wiener	Bilateral
Image 1				
Image 2				
Image 3				

VII. PERFORMANCE EVALUATION

A. PERFORMANCE METRICS

The Performance metrics is used to evaluate the performance of the improved quality image. The performance metrics are PSNR,SSIM,RMSE,EPI,COC.

1. Peak-Signal to Noise-Ratio(PSNR)

PSNR, is the ratio between the maximum possible power of a signal and the power of corrupting noise. It is computed as:

$$\text{PSNR} = 20 \log_{10}(255/\text{RMSE})$$

Higher PSNR generally indicates the image is of higher quality.

2. Structural Similarity Index Measure (SSIM)

The Structural Similarity (SSIM) index measure is a method for measuring the similarity between two images. It is computed as:

$$\text{SSIM}(x, y) = \frac{(2\mu_x \mu_y + C_1)(2\sigma_{xy} + C_2)}{(\mu_x^2 + \mu_y^2 + C_1)(\sigma_x^2 + \sigma_y^2 + C_2)}$$

Where $\mu_x = \sum_{i=1}^N W_i X_i$

$$\sigma_x = \sum_{i=1}^N W_i (x_i - \mu_x)^2)^{\frac{1}{2}}$$

$$\sigma_{xy} = \sum_{i=1}^N (x_i - \mu_x)(y_i - \mu_y)$$

$$C_1 = (K_1, L)^2 \text{ and } C_2 = (K_2, L)^2$$

Where L is the range of pixel values(255 for 8-bit grayscale images). And $K_1 \ll 1$ is a small constant and also $K_2 \ll 1$.

3. Root Mean Square Error (RMSE)

The square root of the mean/average of the square of all of the error. The use of RMSE is very common and it makes an excellent general purpose error metric for numerical predictions. Compared to the similar Mean Absolute Error, RMSE amplifies and severely punishes large errors.



International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Website: www.ijirce.com

Vol. 5, Issue 1, January 2017

$$RMSE = \sqrt{\frac{1}{n} \sum_{i=1}^n (y_i - \hat{y}_i)^2}$$

Where y_i is original image and \hat{y}_i is an improved quality image.

4. Edge Preservation Index (EPI)

EPI are widely used as useful tools for a variety of image editing and manipulation tasks, while preserving fine details and geometrical structures in the original image. It is computed according to equation

$$EPI = \frac{\sum (\Delta x - \overline{\Delta x})(\Delta y - \overline{\Delta y})}{\sqrt{\sum (\Delta x - \overline{\Delta x})^2 \sum (\Delta y - \overline{\Delta y})^2}}$$

where, Δx and Δy are the high pass filtered versions of images x and y , obtained with a 3×3 pixel standard approximation of the Laplacian operator. The $\overline{\Delta x}$ and $\overline{\Delta y}$ are the mean values of the high pass filtered versions of Δx and Δy respectively.

5. Correlation Coefficient (CoC)

The correlation coefficient is a measure that determines the degree to which two variables' movements are associated. The range of values for the correlation coefficient is -1.0 to 1.0. If a calculated correlation is greater than 1.0 or less than -1.0, a mistake has been made. A correlation of -1.0 indicates a perfect negative correlation, while a correlation of 1.0 indicates a perfect positive correlation.

$$\rho_{xy} = \frac{\text{COV}(r_x, r_y)}{\sigma_x \sigma_y}$$

B. PERFORMANCE EVALUATION

The performance of the script with ICM and filtering techniques were examined using the metrics PSNR, SSIM, RMSE, EPI and CoC. The experiments are performed on image1, image2 and image3 with ICM and the three filtering techniques and the results are shown in the Table 4.

Table 4: Metrics for the enhanced image after applying filters

Image	Metrics / Filters	PSNR	SSIM	RMSE	EPI	COC
1	Adaptive	20.969	0.079	22.808	7.285	0.585
	Wiener	20.926	0.069	22.918	5.660	0.769
	Bilateral	20.966	0.079	22.816	7.213	0.582
2	Adaptive	20.693	0.057	23.542	7.665	0.748
	Wiener	20.682	0.054	23.573	4.171	0.851



International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Website: www.ijirce.com

Vol. 5, Issue 1, January 2017

	Bilateral	20.692	0.057	23.545	7.642	0.749
3	Adaptive	20.696	0.069	23.534	7.372	0.569
	Wiener	20.676	0.064	23.588	7.241	0.730
	Bilateral	20.696	0.069	23.535	7.423	0.571

VIII. CONCLUSION

The images are compared by varying log transformation values to find an enhanced image. Filters like Adaptive, Wiener and Bilateral are used for all the enhanced images from which metrics like Peak-Signal to Noise Ratio (PSNR), Structural Similarity Index Measure (SSIM), Root Mean Square Error (RMSE), Edge Preservation Index (EPI) and Correlation Coefficient (CoC) are calculated. It is found that in all the images 1, 2 and 3 Adaptive and Bilateral filter shows better results in enhancing images with increased values for the metrics PSNR, SSIM and decreased value for RMSE. Bilateral filter shows a better result in preserving the edges of the images. Wiener Filter shows a better result for the Correlation Coefficient

REFERENCES

1. Sasi Gopalan, Madhu S Nair and Souriar Sebastian "Approximation Studies on Image Enhancement Using Fuzzy Technique" International Journal of Advanced Science and Technology, Vol. 10, pp.11-26, September, 2009.
2. Bhabatosh Chanda and Dwijest Dutta Majumder, 2002, Digital Image Processing and Analysis.
3. R. Jain, R. Kasturi and B.G. Schunck, Machine Vision, McGraw-Hill International Edition, 1995.
4. Papiya C. Histogram equalization by cumulative frequency distribution. International Journal of Scientific and Research Publications. 2012; 2(7):1-4.
5. R. Eckhorn, H.J. Reitboeck, M. Arndt, P.W. Dicke, A neural network for feature linking via synchronous activity: results from cat visual cortex and from simulations, in: Models of Brain Function, Cambridge University Press, Cambridge, UK, 1989, pp. 255-272.
6. H.J. Reitboeck, R. Eckhorn, M. Arndt, P. Dicke, A model of feature linking via correlated neural activity, in: Synergetics of Cognition, Springer, New York, 1989, pp. 112-125.
7. R. Eckhorn, H.J. Reitboeck, M. Arndt, P.W. Dicke, Feature linking via synchronization among distributed assemblies: simulation of results from cat cortex, Neural Computing 2 (1990) 293-307.
8. I.A. Rybak, N.A. Shevtsova, L.N. Podladchikova, A.V. Golovan, A visual cortex domain model and its use for visual information processing, Neural Networks 4 (1991) 3-13.
9. I.A. Rybak, N.A. Shevtsova, V.M. Sandier, The model of a neural network visual preprocessor, Neurocomputing 4 (1992) 93-102.
10. J.L. Johnson, D. Ritter, Observation of periodic waves in a pulse-coupled neural network, Optical Letter 18 (1993) 1253.
11. H.S. Ranganath, G. Kuntimad, J.L. Johnson, Pulse coupled neural networks for image processing, in: Proc. the Southeast Conference on 'Visualize the future', 1995, pp. 37-43.
12. L. Johnson, H. Ranganath, G. Kuntimad, H.J. Caulfield, Pulse-coupled neural networks, in: Neural Networks and Pattern Recognition, Academic Press, San Diego, CA, 1998, pp. 1-56.
13. Hodgkin, A. L., & Huxley, A. F. (1952). A quantitative description of membrane current and its application to conduction and excitation in nerve. Journal of Physiology, 117, 500-544.



ISSN(Online): 2320-9801
ISSN (Print): 2320-9798

International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Website: www.ijircce.com

Vol. 5, Issue 1, January 2017

BIOGRAPHY



S.ASHIKA PARVIN is currently pursuing M.Phil degree in computer science in Sadakathullah Appa College, Tirunelveli. She has done her MCA degree in Computer Science from ST. Xavier's College, Tirunelveli and BCA degree in Computer Science from Sadakathullah Appa College, Tirunelveli under Manonmaniam Sundaranar University, Tirunelveli.



Shajun Nisha S, Professor and Head of the Department of P.G Computer Science, Sadakathullah Appa College, Tirunelveli. She has completed M.Phil. (Computer Science) and M.Tech (Computer and Information Technology) in Manonmaniam Sundaranar University, Tirunelveli. She has involved in various academic activities. She has attended so many national and international seminars, conferences and presented numerous research papers. She is a member of ISTE and IEANG and her specialization is Image Mining.